

Uputstvo za upotrebu (EN)

DeepCool napajanje PF400 400W

DEEPCOOL 




Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:


<https://tehnoteka.rs/p/deepcool-napajanje-pf400-400w-akcija-cena/>

ATX SWITCHING POWER SUPPLY

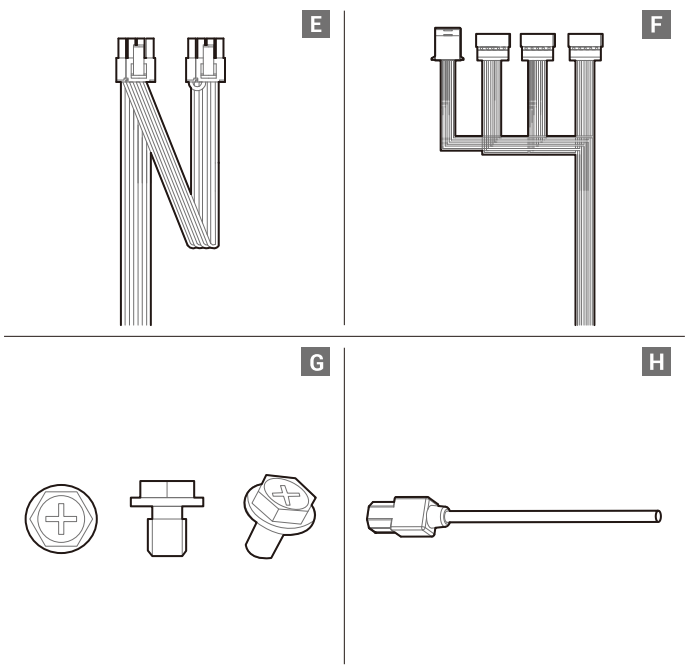

www.deepcool.com

Model	PF350-40A			PF400-40A		
Wyjście AC	200-240V~	3.5A	50Hz	100-240V~	3.5A	50Hz
Wyjście DC	+3.3V ~ +12V	+12V ~ +12V	+5V~9V	+3.3V ~ +12V	+12V ~ +12V	+5V~9V
Mała, natężenie wyjściowe	15.0A	15.0A	26.0A	0.3A	15.0A	20.0A
Mała, łączna moc wyjściowa	100W	312W	3.6W	12.5W	100W	324W
Mała, całkowita moc wyjściowa	350W			400W		
Model	PF450-40A			PF500-40A		
Wyjście AC	200-240V~	3.5A	50Hz	200-240V~	4.0A	50Hz
Wyjście DC	+3.3V ~ +12V	+12V ~ +12V	+5V~9V	+3.3V ~ +12V	+12V ~ +12V	+5V~9V
Mała, natężenie wyjściowe	15.0A	15.0A	35.0A	0.3A	2.5A	15.0A
Mała, łączna moc wyjściowa	100W	420W	3.6W	12.5W	100W	450W
Mała, całkowita moc wyjściowa	450W			500W		
Model	PF550-40A			PF600-40A		
Wyjście AC	200-240V~	3.5A	50Hz	200-240V~	4.5A	50Hz
Wyjście DC	+3.3V ~ +12V	+12V ~ +12V	+5V~9V	+3.3V ~ +12V	+12V ~ +12V	+5V~9V
Mała, natężenie wyjściowe	15.0A	15.0A	44.0A	0.3A	2.5A	15.0A
Mała, łączna moc wyjściowa	100W	528W	3.6W	12.5W	100W	576W
Mała, całkowita moc wyjściowa	550W			600W		
Model	PF650-40A			PF700-40A		
Wyjście AC	200-240V~	3.5A	50Hz	200-240V~	5.0A	50-60Hz
Wyjście DC	+3.3V ~ +12V	+12V ~ +12V	+5V~9V	+3.3V ~ +12V	+12V ~ +12V	+5V~9V
Mała, natężenie wyjściowe	15.0A	15.0A	52.0A	0.3A	2.5A	15.0A
Mała, łączna moc wyjściowa	120W	624W	3.6W	12.5W	100W	656W
Mała, całkowita moc wyjściowa	650W			700W		
Model	PF750-40A			PF800-40A		
Wyjście AC	200-240V~	10.0A	MAX	50-60Hz	200-240V~	10.0A
Wyjście DC	+3.3V ~ +12V	+12V ~ +12V	+5V~9V	+3.3V ~ +12V	+12V ~ +12V	+5V~9V
Mała, natężenie wyjściowe	15.0A	15.0A	62.0A	0.3A	2.5A	15.0A
Mała, łączna moc wyjściowa	100W	750W	3.6W	12.5W	100W	800W
Mała, całkowita moc wyjściowa	750W			800W		

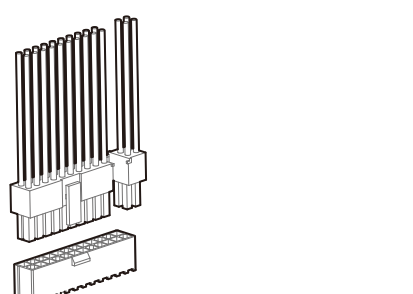[illegible]

モータ	PF3500-4HA				PF4000-4HA			
AC入力	200-240VAC 3.5A 50Hz				200-240VAC 3.5A 50Hz			
DC出力	+3.3V +15V +12V +12V +5V+5B				+3.3V +5V +12V +12V +5V+5B			
最大出力(W)	15.0A 15.0A 25.0A 0.3A 2.5A				15.0A 15.0A 32.0A 0.3A 2.5A			
最大電力(W)	100W 31.2W 3.6W 12.5W				100W 38.4W 3.6W 12.5W			
合計出力	350W				400W			
モータ	PF4500-4HA				PF5000-4HA			
AC入力	200-240VAC 3.5A 50Hz				200-240VAC 4.5A 50Hz			
DC出力	+3.3V +15V +12V +12V +5V+5B				+3.3V +5V +12V +12V +5V+5B			
最大出力(W)	15.0A 15.0A 35.0A 0.3A 2.5A				15.0A 15.0A 40.0A 0.3A 2.5A			
最大電力(W)	100W 42.0W 3.6W 12.5W				100W 48.0W 3.6W 12.5W			
合計出力	450W				500W			
モータ	PF5500-4HA				PF6000-4HA			
AC入力	200-240VAC 3.5A 50Hz				200-240VAC 4.5A 50Hz			
DC出力	+3.3V +15V +12V +12V +5V+5B				+3.3V +5V +12V +12V +5V+5B			
最大出力(W)	15.0A 15.0A 44.0A 0.3A 2.5A				15.0A 15.0A 48.0A 0.3A 2.5A			
最大電力(W)	100W 52.0W 3.6W 12.5W				100W 57.6W 3.6W 12.5W			
合計出力	550W				600W			
モータ	PF6500-4HA				PF7000-4HA			
AC入力	200-240VAC 3.5A 50Hz				200-240VAC 5.0A 50-60Hz			
DC出力	+3.3V +15V +12V +12V +5V+5B				+3.3V +5V +12V +12V +5V+5B			
最大出力(W)	15.0A 15.0A 52.0A 0.3A 2.5A				15.0A 15.0A 58.0A 0.3A 2.5A			
最大電力(W)	120W 62.0W 3.6W 12.5W				100W 65.0W 3.6W 12.5W			
合計出力	650W				750W			
モータ	PF7500-4HA				PF8000-4HA			
AC入力	200-240VAC 3.5A 50-60Hz				200-240VAC 5.0A 50-60Hz			
DC出力	+3.3V +5V +12V +12V +5V+5B				+3.3V +5V +12V +12V +5V+5B			
最大出力(W)	15.0A 15.0A 62.0A 0.3A 2.5A				15.0A 15.0A 68.0A 0.3A 2.5A			
最大電力(W)	100W 75.0W 3.6W 12.5W				100W 78.0W 3.6W 12.5W			
合計出力	750W				800W			

모형	PF350-HA			PF400-CA		
AC 입력	200~240VAC	3.5A	50Hz	100~240VAC	3.5A	50Hz
DC 출력	+3.3V ~ +5V	+12V ~ +12V	+5VIB	+3.3V ~ +5V	+12V ~ +12V	+5VIB
회로 접점의 최대 허용 전류	15.0A	15.0A	26.0A	0.3A	15.0A	32.0A
출력	100W	31.2W	3.6W 12.5W	100W	38.4W	6.6W 12.5W
	350W			400W		
모형	PF450-HA			PF500-CA		
AC 입력	200~240VAC	3.5A	50Hz	200~240VAC	4.0A	50Hz
DC 출력	+3.3V ~ +5V	+12V ~ +12V	+5VIB	+3.3V ~ +5V	+12V ~ +12V	+5VIB
회로 접점의 최대 허용 전류	15.0A	15.0A	32.0A	15.0A	15.0A	40.0A
출력	100W	42.0W	3.6W 12.5W	100W	48.0W	3.6W 12.5W
	450W			500W		
모형	PF550-HA			PF600-CA		
AC 입력	200~240VAC	4.0A	50Hz	200~240VAC	4.5A	50Hz
DC 출력	+3.3V ~ +5V	+12V ~ +12V	+5VIB	+3.3V ~ +5V	+12V ~ +12V	+5VIB
회로 접점의 최대 허용 전류	15.0A	15.0A	44.0A	0.3A	25.0A	15.0A
출력	100W	52W	3.6W 12.5W	100W	57.6W	3.6W 12.5W
	550W			600W		
모형	PF650-HA			PF700-HA		
AC 입력	200~240VAC	4.5A	50Hz	200~240VAC	10.0A	60/50Hz
DC 출력	+3.3V ~ +5V	+12V ~ +12V	+5VIB	+3.3V ~ +5V	+12V ~ +12V	+5VIB
회로 접점의 최대 허용 전류	15.0A	15.0A	52.0A	0.3A	25.0A	25.0A
출력	120W	64.0W	3.6W 12.5W	100W	69.6W	3.6W 12.5W
	650W			700W		
모형	PF750-HA					
AC 입력	200~240VAC	10.0A	50/60Hz			
DC 출력	+3.3V ~ +5V	+12V ~ +12V	+5VIB			
회로 접점의 최대 허용 전류	15.0A	15.0A	62.0A			
출력	100W	75.0W	3.6W 12.5W			

型號	PF3900-A 50Hz				PF4000-A 50Hz			
交流輸出	200~240Vac	3.5A	40Hz		100~240Vac	3.5A	50Hz	
最大輸出功率	+3.3V ~ +5V	+12V ~ +12V	+5V0dB		+3.3V ~ +5V	+12V ~ +12V	+5V0dB	
最大輸出電流	15.0A	15.0A	26.0A	0.3A, 2.5A	15.0A	15.0A	32.0A	0.3A, 2.5A
最大輸出功率	100W	31.2W	3.6W	12.5W	100W	38.4W	3.6W	12.5W
總功率	350W				400W			
型號	PF4600-A 50Hz				PF5000-A 50Hz			
交流輸出	200~240Vac	3.5A	40Hz		200~240Vac	4.0A	50Hz	
最大輸出功率	+3.3V ~ +5V	+12V ~ +12V	+5V0dB		+3.3V ~ +5V	+12V ~ +12V	+5V0dB	
最大輸出電流	15.0A	15.0A	35.0A	0.3A, 2.5A	15.0A	15.0A	40.0A	0.3A, 2.5A
最大輸出功率	100W	420W	3.6W	12.5W	100W	480W	3.6W	12.5W
總功率	450W				500W			
型號	PF5500-A 50Hz				PF6000-A 50Hz			
交流輸出	200~240Vac	4.5A	50Hz		200~240Vac	4.5A	50Hz	
最大輸出功率	+3.3V ~ +5V	+12V ~ +12V	+5V0dB		+3.3V ~ +5V	+12V ~ +12V	+5V0dB	
最大輸出電流	15.0A	15.0A	44.0A	0.3A, 2.5A	15.0A	15.0A	48.0A	0.3A, 2.5A
最大輸出功率	100W	528W	3.6W	12.5W	100W	576W	3.6W	12.5W
總功率	550W				600W			
型號	PF6600-A 50Hz				PF7000-A 50Hz			
交流輸出	200~240Vac	10.0A	50~60Hz		200~240Vac	10.0A	50~60Hz	
最大輸出功率	+3.3V ~ +5V	+12V ~ +12V	+5V0dB		+3.3V ~ +5V	+12V ~ +12V	+5V0dB	
最大輸出電流	15.0A	15.0A	52.0A	0.3A, 2.5A	15.0A	15.0A	58.0A	0.3A, 2.5A
最大輸出功率	120W	524W	3.6W	12.5W	100W	696W	3.6W	12.5W
總功率	650W				700W			
型號	PF7500-A 50Hz				PF8000-A 50Hz			
交流輸出	200~240Vac	10.0A	50~60Hz		200~240Vac	10.0A	50~60Hz	
最大輸出功率	+3.3V ~ +5V	+12V ~ +12V	+5V0dB		+3.3V ~ +5V	+12V ~ +12V	+5V0dB	
最大輸出電流	15.0A	15.0A	62.0A	0.3A, 2.5A	15.0A	15.0A	68.0A	0.3A, 2.5A
最大輸出功率	100W	744W	3.6W	12.5W	100W	792W	3.6W	12.5W
總功率	750W				800W			

型号 交流输出 最大输出功率 最大组合功率 总功率	PF3500-4A			PF4000-4A		
	200-240VAC	3.5A	50Hz	200-240VAC	3.5A	50Hz
	+3.3V	+5V	+12V	+3.3V	+5V	+12V
	15.0A	15.0A	26.0A	0.3A	2.5A	2.5A
	100W	312W	3.6W	12.5W	384W	3.6W
	350W			400W		
型号 交流输出 最大输出功率 最大组合功率 总功率	PF4500-4A			PF5000-4A		
	200-240VAC	3.5A	50Hz	200-240VAC	4.0A	50Hz
	+3.3V	+5V	+12V	+3.3V	+5V	+12V
	15.0A	15.0A	26.0A	0.3A	2.5A	2.5A
	100W	420W	3.6W	12.5W	480W	3.6W
	450W			500W		
型号 交流输出 最大输出功率 最大组合功率 总功率	PF5500-4A			PF6000-4A		
	200-240VAC	3.5A	50Hz	200-240VAC	4.5A	50Hz
	+3.3V	+5V	+12V	+3.3V	+5V	+12V
	15.0A	15.0A	44.0A	0.3A	2.5A	2.5A
	100W	528W	3.6W	12.5W	576W	3.6W
	550W			600W		
型号 交流输出 最大输出功率 最大组合功率 总功率	PF6500-4A			PF7000-4A		
	200-240VAC	3.5A	50Hz	200-240VAC	5.0A	50-60Hz
	+3.3V	+5V	+12V	+3.3V	+5V	+12V
	15.0A	15.0A	52.0A	0.3A	2.5A	2.5A
	120W	624W	3.6W	12.5W	672W	3.6W
	650W			700W		
型号 交流输出 最大输出功率 最大组合功率 总功率	PF7500-4A			50-50Hz		
	200-240VAC	3.5A	50-50Hz			
	+3.3V	+5V	+12V	+3.3V	+5V	+12V
	15.0A	15.0A	62.0A	0.3A	2.5A	2.5A
	100W	744W	3.6W	12.5W		
	750W					

Installation

A diagram showing the back of the device with a power cord being plugged into the power inlet. An arrow indicates the direction of the cord being inserted.



Important Information on Safety

⚠ ⚠ Beware of electric shock!

Strictly follow the manufacturer's instructions and safety warnings during installation. Failure to follow the provisions may damage the power supply or system, and may cause serious injury, or possibly death.

1. Do not drill holes into this product.
2. The power supply is a high voltage product. Do not open the power supply shell or try to repair the power supply; this power supply has no user-serviceable components.
3. The product is designed for indoor use only.
4. Do not run the power supply near water in a high temperature location, or in a humid environment.
5. Do not install the power supply near heat sources (such as radiators, electric heaters, stoves or other devices that may generate heat).
6. Do not put any objects into the air vents or fan grill area of the power supply.
7. Do not fit the cables or connectors provided with the power supply.
8. If the power supply uses modular cables, only use the modular cables provided by the supplier. Other modular cables may be incompatible, and can cause serious damage to the system and power supply.
9. The detachable 4-pin connector on the 24-pin motherboard cable is not a "P4" or "ATX" connector; if this connector is used as a "P4" or "ATX" connector, it may cause serious damage.
10. Failure to comply with any of the safety and manufacturer's instructions will result in immediate invalidation of the power warranty and insurance.

Wichtige Hinweise zu Ihrer Sicherheit

EN	 Achtung! Stromschlaggefahr!
EN	Connect the AC power cord to the power supply and turn on the power by turning the switch to the "I" position.
EN	Verbinden Sie das Netzkabel mit dem Netzsteckanschluss am Netzgerät und schalten Sie den Schalter in die Position "I" (ein).
EN	Connect the power cord to the power supply and turn on the power by turning the switch to the "I" position.
EN	Verbinden Sie das Netzkabel mit dem Netzsteckanschluss am Netzgerät und schalten Sie den Schalter in die Position "I" (ein).
EN	Connect the power cord to the power supply and turn on the power by turning the switch to the "I" position.
EN	Verbinden Sie das Netzkabel mit dem Netzsteckanschluss am Netzgerät und schalten Sie den Schalter in die Position "I" (ein).
EN	Connect the power cord to the power supply and turn on the power by turning the switch to the "I" position.
EN	Verbinden Sie das Netzkabel mit dem Netzsteckanschluss am Netzgerät und schalten Sie den Schalter in die Position "I" (ein).
EN	Connect the power cord to the power supply and turn on the power by turning the switch to the "I" position.
EN	Verbinden Sie das Netzkabel mit dem Netzsteckanschluss am Netzgerät und schalten Sie den Schalter in die Position "I" (ein).

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda DeepCool, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/deepcool-napajanje-pf400-400w-akcija-cena/>