

## Uputstvo za upotrebu (EN)

ELEGOO Saturn 3 3D štampač

ELEGOO



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:


<https://tehnoteka.rs/p/elegoo-saturn-3-3d-stampac-akcija-cena/>



# SATURN 3

## 3D Printer

**User Manual**

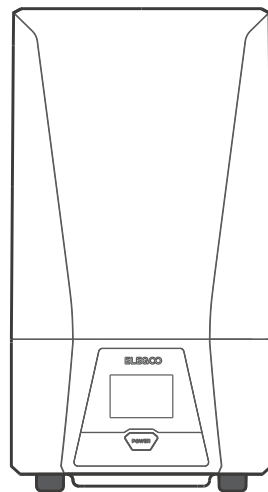

**Thank you for purchasing ELEGOO brand products.**

---

After receiving the product, please confirm whether the equipment is intact and the accessories are complete. If there is any damage or missing, please timely contact us at [3dp@elegoo.com](mailto:3dp@elegoo.com). (To ensure the performance of each product, each product will undergo strict printing tests before leaving the factory. There may be some slight scratches when you receive the product, which is normal, please rest assured to use.)

**ELEGOO**

## Notice:

---

- Please keep the 3D printer and its accessories out of the reach of children.
- Please fill the resin tank no less than 1/3 of its volume, but do not exceed the MAX line position.
- Please place the printer in a dry environment and protect it from rain and moisture.
- If you run into an emergency during use, please turn off the power supply of the 3D printer first.
- Please use the printer indoors and avoid direct sunlight and a dusty environment.
- Please keep the original packaging box for 30 days for return/exchange (only ELEGOO original packaging boxes are accepted).
- Please use 95% (or higher) ethyl alcohol or isopropyl alcohol to wash your model unless you are using water washable resin.
- If the printing fails, you need to clean the excess cured resin in the resin tank and change the resin, otherwise, it may cause damage to your printer.
- When operating the 3D printer, please wear a mask and gloves to avoid direct skin contact with the photopolymer resin.
- When you use the 3D printer for the first time, please level the build platform according to the leveling tutorial before printing.
- If the release film in the resin tank is whitened, scratched, or has no elasticity, the printing failure rate is high, please replace the release film in time.
- If you have any problems with the printer, please contact us at [3dp@elegoo.com](mailto:3dp@elegoo.com). Please do not disassemble or modify ELEGOO 3D printers by yourself, otherwise, the warranty will expire.

# 3D Printer Tech Specs

System: EL3D-3.0.1  
Operation: 3.5-inch Touch Screen  
Slicer Software: Chitu Box & Voxeldance Tango  
Connectivity: USB Interface

## Printing Parameter


Technology: MSLA Stereolithography  
Light Source: COB (wavelength 405nm)  
XY Resolution: 19\*24um (11520\*5120)  
Z-axis Accuracy: 0.02mm  
Layer Thickness: 0.01-0.2mm  
Printing Speed: MAX 70mm/H  
Power Requirements: 100-240V 50/60 Hz 24V 6A

## Printing Specification

Dimension: 305.9mm(L)\*273mm(W)\*567.3mm(H)  
Build Volume: 218.88mm (L)\*122.88mm (W)\*250mm (H)  
Package Size: 640mm(L)\*395mm(W)\*365mm(H)  
Gross Weight: 15.2kg  
Net Weight: 11KG

## Hardware Specification


## Packing List

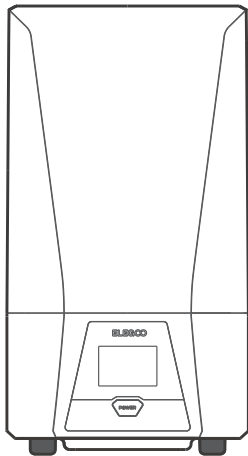


**SATURN 3 3D Printer**



**USB Air Purifier**



**Build Platform**




**Resin Tank**



**U Disk**



**Mask**



**Gloves**



**Funnel**



**Backup Screws**




**User Manual**



**Adapter**




**Tool Kit**



**Scraper**


## Printer Introduction

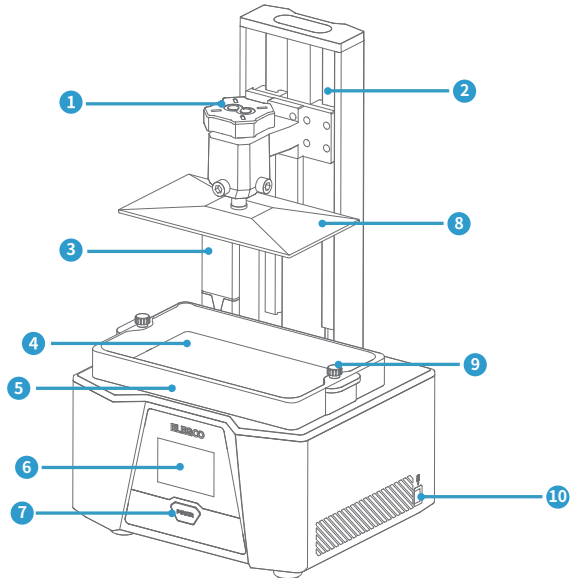

① Screw Knob    ② Z Axis    ③ USB Air Purifier    ④ LCD Display Screen    ⑤ Resin Tank

⑥ Touch Screen    ⑦ Switch    ⑧ Build Plate    ⑨ Screw Knob    ⑩ USB Interface

## Printer Introduction

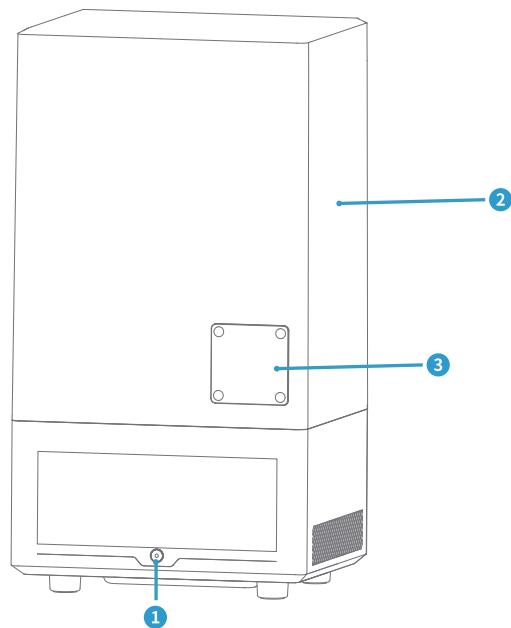


① DC Socket

② Anti-UV Cover


③ Extension Port

## Leveling

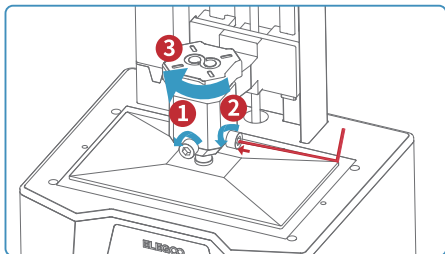


(Picture 1)

1. Remove the resin tank, lock the screw knob ( ③ ) of the build plate, and then loosen the 2 fixing screws ( ① ② ) of the build plate until the build plate can move freely. (See Picture 1)

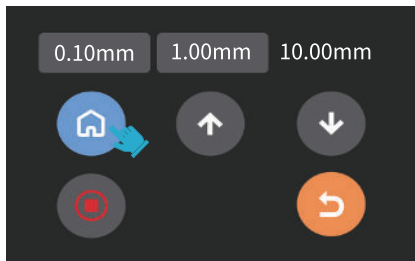

(Picture 2)

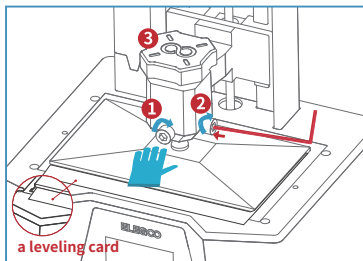


(Picture 3)


2. Place a leveling card between the build plate and the LCD screen, then click "Move Z axis to zero" (See Picture 2). After the printer stops moving, press the top of the build plate with one hand, and lock the fixing screws ( ① ② ) with the other hand. (See Picture 3)

## Leveling

3. Pull the leveling card. If you find there is a slight resistance during this process, you can go directly to step 5. (Note: If there is no resistance when pulling out the leveling card, please click the Z-axis "down" button (in steps of 0.1mm) until there is a slight resistance to pull the leveling card. If there is too much resistance or the leveling card cannot move, please click the Z-axis "up" button (in steps of 0.1mm) until there is slight resistance to pull the leveling card.) (See Picture 4)

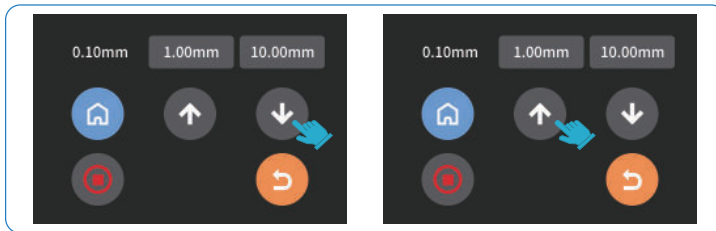

(Picture 4)

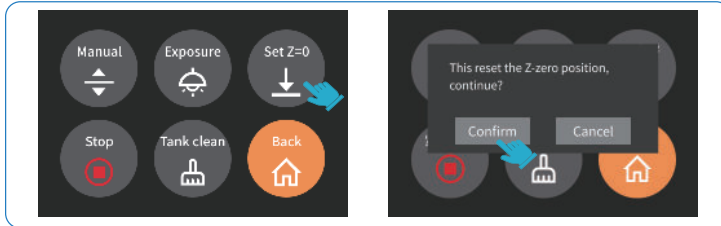


(Picture 5)

4. After completing the above operations, back to the previous menu, and click "Set Z=0", then a confirmation pop-up window will appear in the interface, click "Confirm" to complete the setting. At this time, the current Z-axis position is reset to the new initial height of the first printing layer.

(See Picture 5)

## Leveling

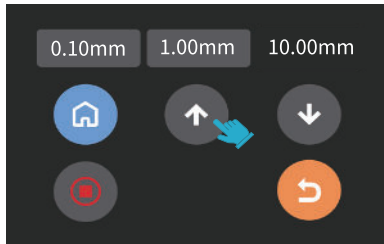

(Picture 6)

5. Click back to the "Manual" page, and click the Z-axis "up" button to raise the Z-axis by a certain distance. (about 100mm)

(See Picture 6)




(Picture 7)

6. Take away the leveling card, and click the "Tool" - "Exposure" - "Next" buttons to test the LCD screen and LED light source. If the LCD can display "ELEGOO TECHNOLOGY www.elegoo.com", then the 3D printer works perfectly. At this time, the leveling is completed, install the resin tank and ready for printing. (See Picture 7)

## Test Printing

### 1. Model Printing


Plug the USB air purifier into the USB port  
(See Picture 8), then slowly add resin to the  
resin tank (do not exceed the MAX line height).  
Cover the printer and then insert the U disk  
into the printer and select the pre-sliced test  
model for printing.

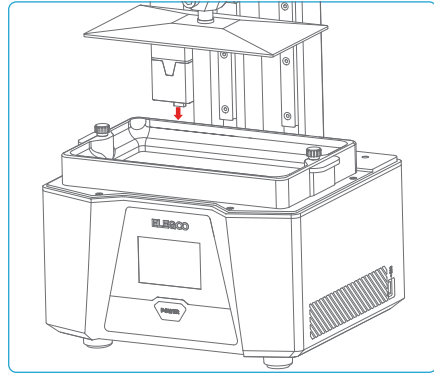

(Picture 8)

### 2. Model Processing

After the printing is completed, wait until the resin on the build plate stops dripping, then loosen the screw knob of the build plate to remove it and remove the model with a scraper. You can use ELEGOO's cleaning and curing machine to post-process the model. (See Picture 9)

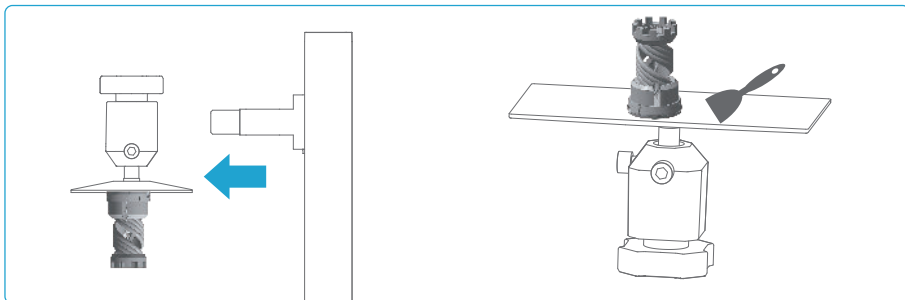

(Picture 9)

## Software Installation and Setup

The printer can install and use Chitu Box and Voxeldance Tango slicing software in the USB flash drive, here we take Chitu Box as an example.

### 1. Install Chitu Box

Select the right version of slicing software on the USB flash drive and install it on your computer.

### 2. How to Use Chitu Box

After the installation is complete, run the Chitu Box software. Click "File-Open File", then open your 3D model file (.stl type). By left-clicking on the model and using the options on the left menu, you can control and change the viewing angle, size, and position of the model.

#### Other Operations:

- 1) Long press the left button and drag the model to the position you want.
- 2) Scroll the mouse wheel to zoom in or zoom out the model.
- 3) Long press the right mouse button to view the different perspectives of the model.


### 3. Chitu Box Setting

#### 3.1 Machine Configuration Parameters

Click "Parameter Settings" and select ELEGOO SATURN 3 as your default printer. (See Picture 10)



(Picture 10)

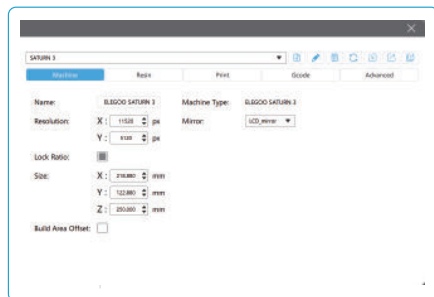

(Picture 11)

#### 3.2 Build Volume


You don't need to change the default parameters (See Picture 11), and X indicates the maximum print size in the X-axis direction, and so on.

## Software Installation and Setup

### 3.3 Resin Parameter (See Picture 12)

**Resin Density:** 1.1g/ml

**Resin Cost:** You can input the real price of the resin you purchased, and the slicing software can calculate the resin costs for each model you print.

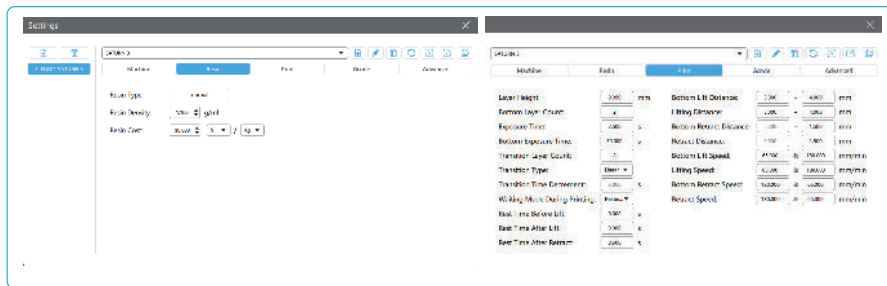

(Picture 12)

### 3.4 Parameters (See Picture 12)

**Layer Height:** The thickness of each printed layer, the recommended height is 0.05mm, but you can set it from 0.01-0.2mm. The higher thickness you set, the longer the exposure time will be required for each layer.

**Number of Bottom Layers:** The set number of initial printing layers. If the number of bottom layers is n, the exposure time of the first n layers is the exposure time of the bottom layer. The default setting is 2.

**Exposure Time:** The exposure time for normal printing layers. The default exposure time is 2.5s, the thicker the print layer setting, the longer the time required.

**Bottom Layer Exposure Time:** The setting of bottom layer exposure time. Properly increasing the bottom layer exposure time can help to increase the bonding strength between the printed model and the printing platform, and the default setting is 30s.

**Transition Layers:** The number of transition layers after the bottom layers for a tighter bonding between layers. Except for the exposure time, other parameters of the transition layer are the same as the normal layer.

## Software Installation and Setup

**Transition Type:** Set the transition type of exposure time when transitioning from bottom layers to normal layers, the default is linear transition.

**The Quiescent Time Before Lifting:** The time difference between the end of the exposure and the start of the build platform moving away from the exposure surface, the default setting is 0 seconds.

**The Quiescent Time After Lifting:** The time difference between the build platform starts to standstill and starts to return after the build platform lift, the default setting is 0 seconds.

**The Quiescent Time After Retract:** After the build platform moves to the printing surface, the time difference between the build platform starting to stationary and starting to exposure, the default setting is 0.5 seconds.

**Bottom Lifting Distance:** During the bottom printing process, the distance that the build platform moves away from the printing surface each time, the default setting is 3+4mm.

**Lifting Distance:** In the normal layer printing process, the distance that the build platform moves away from the printing surface each time, the default setting is 3+4mm.

**Bottom Retract Distance:** During the bottom printing process, the retract distance of the build platform, please do not change if not necessary.

**Retract Distance:** In the normal layer printing process, the retract distance of the build platform, please do not change if not necessary.

**Bottom Lifting Speed:** During the bottom printing process, the moving speed of the build platform away from the printing surface each time, the default setting is 65+180mm/min.

**Lifting Speed:** In the normal layer printing process, the moving speed of the build platform away from the printing surface each time; the default setting is 65+180mm/min.


**Bottom Retract Speed:** During the bottom printing process, the moving speed of the build platform is close to the printing surface; the default setting is 180+65mm/min.

**Retract Speed:** In the normal layer printing, the moving speed of the build platform is close to the printing surface; the default setting is 180+65mm/min.

## Software Installation and Setup

### 4. Save the Model

After setting up all the parameters, click "Slice", and once it's done, click "Save" to export the sliced file and copy it to U Disk; then insert the U disk into your printer, and start printing. (See [Picture 13](#))

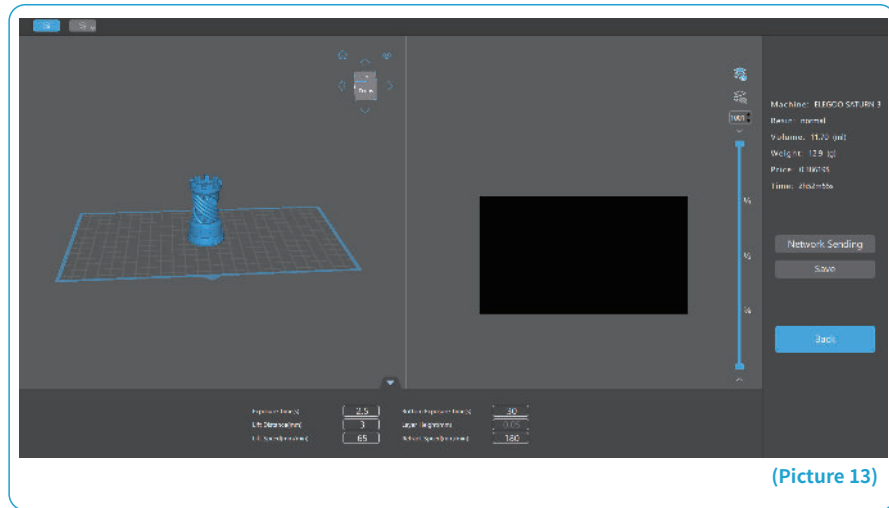

(Picture 13)

## Machine Maintenance


---

- Please do not use sharp or pointy tools to scrape the resin tank to avoid damaging the release liner film.
- Please clean up the resin tank before changing the resin to another color.
- Before and after printing, clean the build plate with paper towels or alcohol to ensure that there are no bumps or burrs on the build plate.
- Before each printing, daily check the exterior of the machine and all mechanical parts for any obvious damage, defects, or abnormalities.
- Try to keep the printing environment at 25-30 degrees Celsius when printing, and ventilate the printing room as much as possible to facilitate heat dissipation of the machine and resin odor volatilization.
- If the Z-axis keeps making friction noise, please add some lubricant to the lead screw. Please check and apply lubricant grease at least every 2-3 months, and increase the frequency of application as the printing frequency increases.
- If you don't use the printer in the next 48 hours, please pour the remaining resin from the resin tank back into the resin bottle and seal it well. If there is any residue, please use a filter to filter it out.
- Check the condition of the release film before each printing, and observe whether the release film is loose, whether there are scratches or severe whitening on the surface, and if so, replace it in time. The release film is a vulnerable part, please replace it at least once every 1-2 months, and increase the replacement frequency as the printing frequency increases.
- Please be careful when removing the printing platform to prevent damaging the LCD screen. The service life of the screen is about 2000+ hours and will decrease with increasing printing frequency. Do a good job of daily screen cleaning, and unplug the machine in time after printing. If there is a screen exposure problem or service life has seriously affected the print quality, please replace the screen in time.

## Warranty Statement

---

1. From the date of purchase, ELEGOO printer is entitled to 1-year free warranty service, except for consumables of the LCD screen and the release film.
2. The LCD screen enjoys a 6-month free warranty service.
3. The free warranty does NOT include problems caused by self-disassembly and improper use, wear and tear of the machine housing, etc.

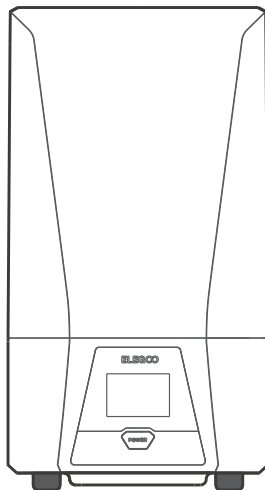

Email Support



Discussion Forums



Help Articles

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Elegoo, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/elegoo-saturn-3-3d-stampac-akcija-cena/>