

Uputstvo za upotrebu (EN)

MSI zakrivljeni monitor 32" QD-OLED MPG 321CURX



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/msi-zakrivljeni-monitor-32-qd-oled-mpg-321curx-akcija-cena/>



MAG & MPG Series

OLED Monitor

MAG 321CUP QD-OLED (3DD5)

MPG 321CURX QD-OLED (3DD6)

User Guide

Contents

- Getting Started3
 - Package Contents 3
 - Installing the Monitor Stand..... 4
 - Adjusting the Monitor 5
 - Monitor Overview 6
 - Connecting the Monitor to PC..... 10
- OSD Setup.....11
 - Navi Key..... 11
 - Hot Key 12
- OSD Menus13
 - G.I..... 14
 - Gaming..... 15
 - Professional 16
 - Image..... 17
 - Input Source..... 17
 - PIP/PBP..... 18
 - Navi Key..... 19
 - Settings..... 19
 - MSI OLED Care..... 21
- Specifications23
- Preset Display Modes25
- Troubleshooting.....28
- Safety Instructions29
- TÜV Rheinland Certification31
- Regulatory Notices.....32

Getting Started

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

Package Contents


Monitor	MAG 321CUP QD-OLED	MPG 321CURX QD-OLED
Documentation	Quick Start Guide	
Accessories	Stand	
	Stand Base with Screw(s)	
	Screw(s) for Wall Mount Bracket(s)	
	Power Cord	
Cables	Ultra High Speed HDMI™ Cable (Optional)	
	DisplayPort Cable (Optional)	
		USB Upstream Cable (for USB Type-B Upstream Port)

 Important

- *Contact your place of purchase or local distributor if any of the items is damaged or missing.*
- *Package contents may vary by country and model.*
- *The included power cord is exclusively for this monitor and should not be used with other products.*

Installing the Monitor Stand

1. Leave the monitor in its protective packaging. Align the stand to the monitor groove.
2. Push the stand towards the monitor groove until it locks in place.
3. Connect the base to the stand and tighten the base screw to secure the base.
4. Make sure the stand assembly is properly installed before setting the monitor upright.

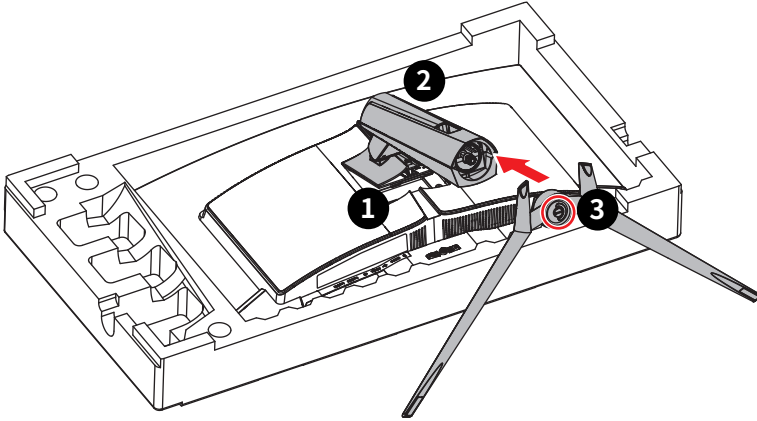

Important


- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The groove for installing the stand bracket can also be used for wall mount. Please contact your dealer for proper wall mount kit.

Adjusting the Monitor


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.




Avoid touching the display panel when adjusting the monitor.

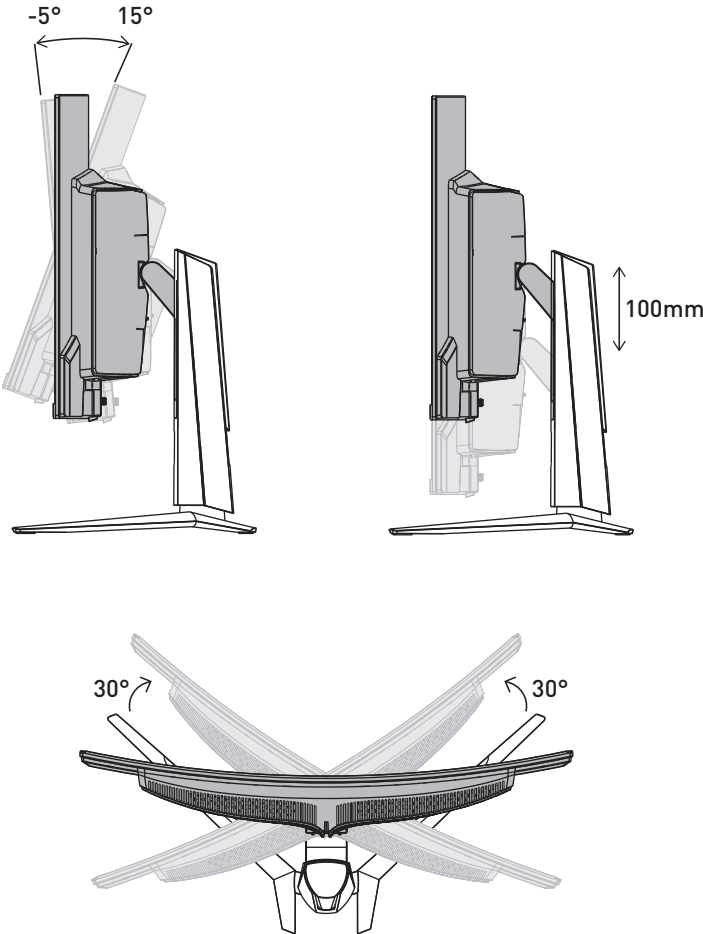


Monitor Overview

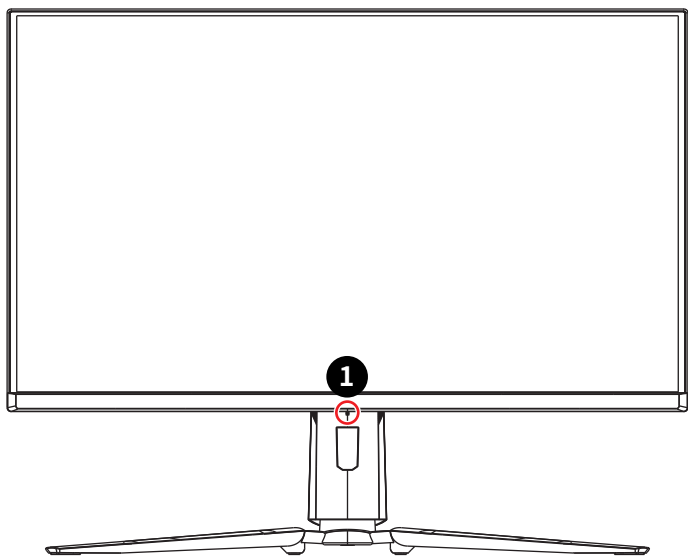

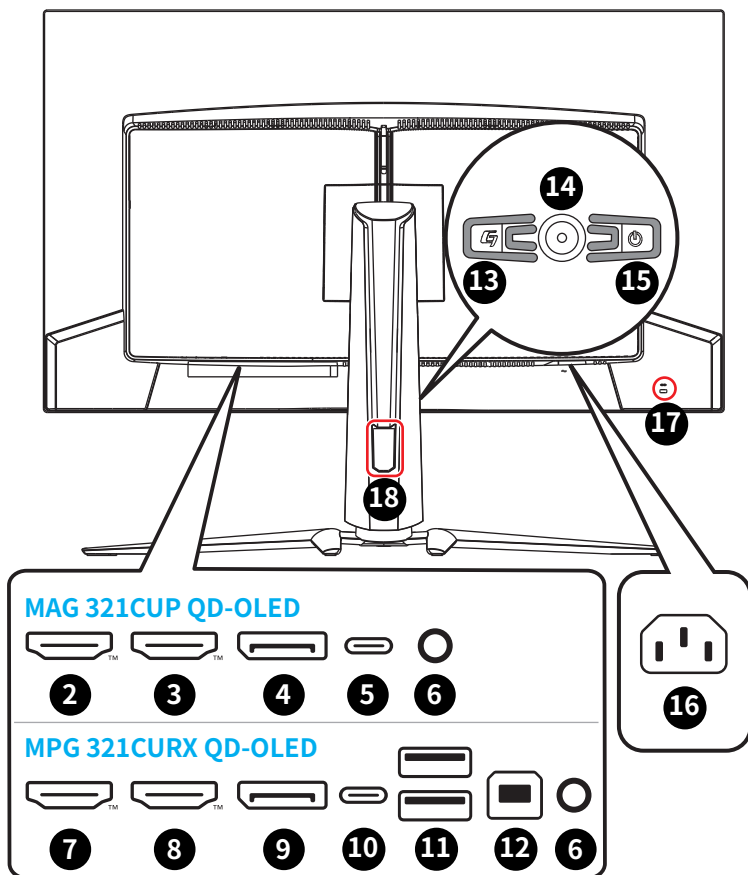


1	Power LED Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.
2	HDMI™ Connector HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE Supports HDMI™ CEC, 3840x2160@165Hz as specified in HDMI™ 2.1.  Important To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables .

3	 HDMI™ Connector Supports 3840x2160@165Hz as specified in HDMI™ 2.1.  Important <i>To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.</i>
4	DisplayPort Supports 3840x2160@165Hz as specified in DisplayPort 1.4a.
5	USB Type-C Port This port supports DisplayPort Alternate (DP Alt) Mode and up to 5V/3A (15W) power delivery.  Important <i>Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor.</i>
6	Headphone Jack
7	 HDMI™ Connector Supports HDMI™ CEC, 3840x2160@240Hz as specified in HDMI™ 2.1.  Important <i>To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.</i>
8	 HDMI™ Connector Supports 3840x2160@240Hz as specified in HDMI™ 2.1.  Important <i>To ensure optimal performance and compatibility, please use only HDMI™ cables certified with the official HDMI™ logo when connecting this monitor. For more information, please visit https://www.hdmi.org/resource/cables.</i>
9	DisplayPort Supports 3840x2160@240Hz as specified in DisplayPort 1.4a.

10	USB Type-C Port This port supports DisplayPort Alternate (DP Alt) Mode and up to 20V/4.9A (98W) power delivery.  Important <i>Your USB-C signal source and cable must support DisplayPort Alternate Mode to enable video output to the monitor.</i> <table><tr><th>USB Type-C Power Delivery</th></tr><tr><td>5V / 3A (15W)</td></tr><tr><td>9V / 3A (27W)</td></tr><tr><td>12V / 3A (36W)</td></tr><tr><td>15V / 3A (45W)</td></tr><tr><td>20V / 4.9A (98W)</td></tr></table>	USB Type-C Power Delivery	5V / 3A (15W)	9V / 3A (27W)	12V / 3A (36W)	15V / 3A (45W)	20V / 4.9A (98W)
USB Type-C Power Delivery							
5V / 3A (15W)							
9V / 3A (27W)							
12V / 3A (36W)							
15V / 3A (45W)							
20V / 4.9A (98W)							
11	USB 2.0 Type-A Port						
12	USB 2.0 Type-B Upstream Port For USB Upstream Cable.  Important <i>Check the package for USB Upstream Cable and connect it to the PC and monitor. Once this cable is connected, the USB Type-A Downstream Ports on the monitor will be ready for use.</i> 						
13	Macro Key (MPG 321CURX QD-OLED) To activate MSI Gaming Intelligence Application. G Key (MAG 321CUP QD-OLED) To activate the OSD Application.						
14	Navi Key						
15	Power Button						
16	Power Jack						
17	Kensington Lock						
18	Cable Routing Hole						


Connecting the Monitor to PC

1. Turn off your computer.
2. Connect the video cable from the monitor to your computer.
3. Connect the power cord to the monitor power jack. (Figure A)
4. Plug the power cord into the electrical outlet. (Figure B)
5. Turn on the monitor. (Figure C)
6. Power on the computer and the monitor will auto detect the signal source.

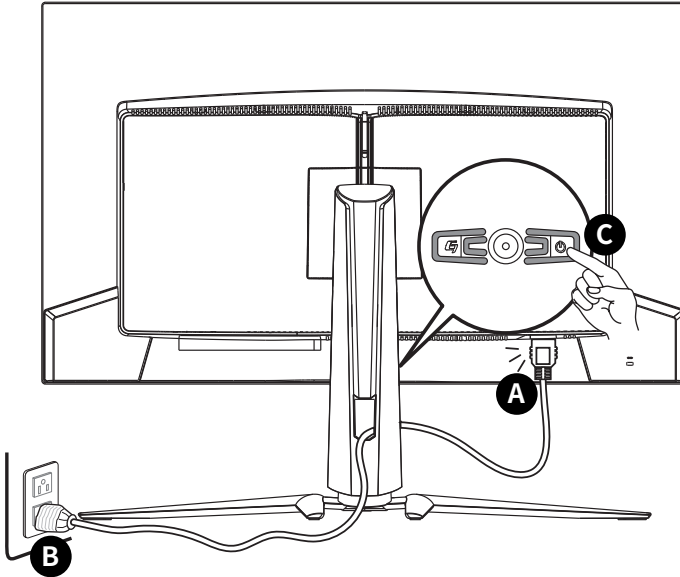

Important

To optimize performance, please remove the protective film from the display panel before use.

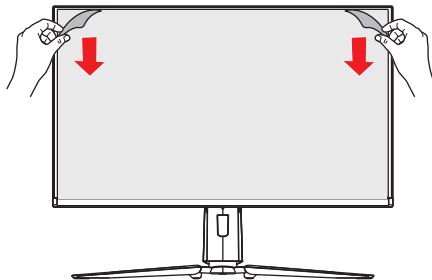

OSD Setup


This chapter provides you with essential information on OSD Setup.



All information is subject to change without prior notice.

Navi Key

The monitor comes with a Navi Key, a multi-directional control that helps navigate the On-Screen Display (OSD) menu.

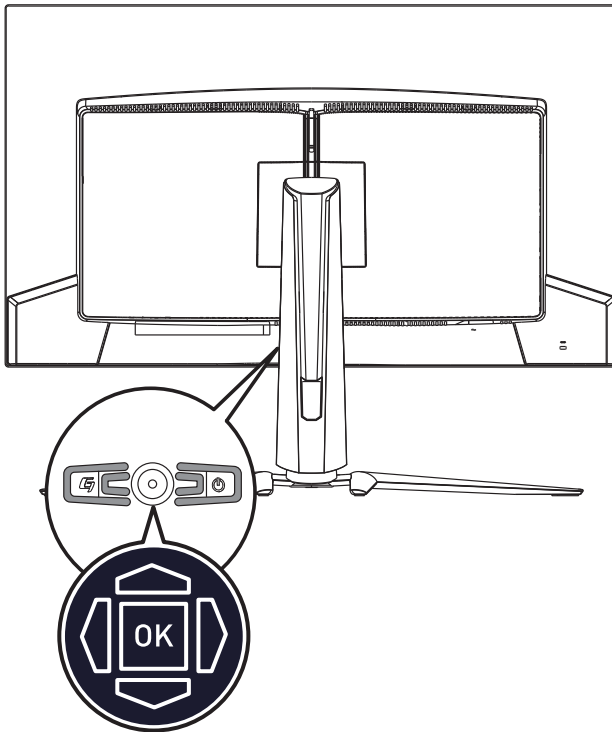

Up/Down/Left/Right:

- selecting function menus and items
- adjusting function values
- entering into/exiting from function menus

Press (OK):


- launching the On-Screen Display (OSD)
- entering submenus
- confirming a selection or setting

Hot Key


- Users may enter into preset function menus by moving the Navi Key up, down, left or right when the OSD menu is inactive.
- Users may customize their own Hot Keys to enter into different function menus.

OSD Menus

MAG 321CUP QD-OLED

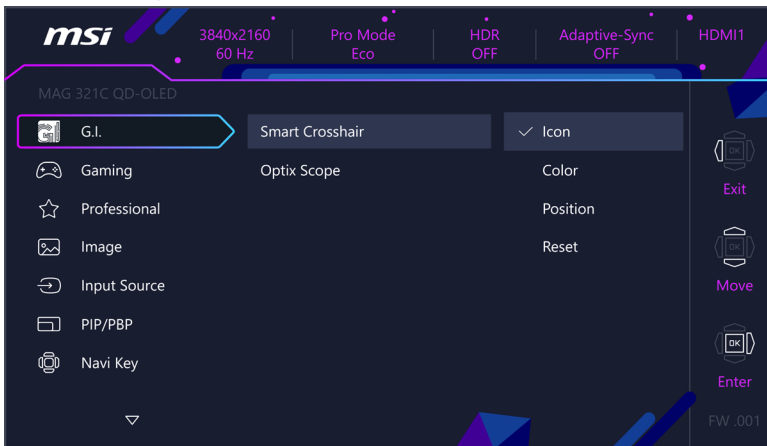

MPG 321CURX QD-OLED

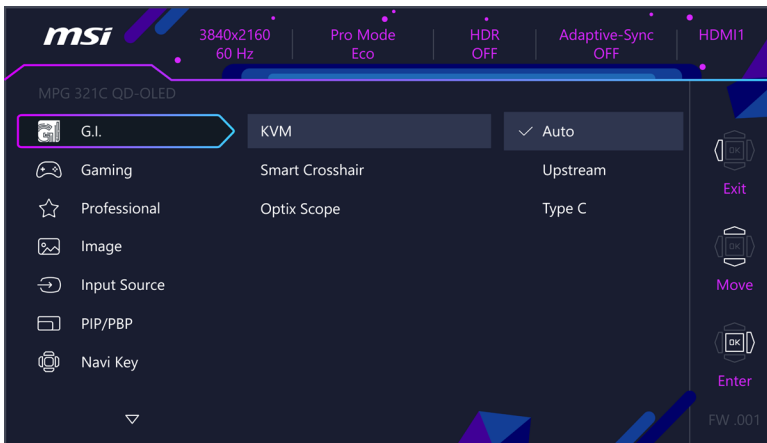

Important

The following settings will be grayed out when HDR signals are received:

- Night Vision
- AI Vision
- Low Blue Light
- Brightness
- Contrast
- Color Temperature
- Optix Scope
- PIP/PBP

G.I.

1st Level Menu	2nd/3rd Level Menu		Description							
KVM (MPG 321CURX QD-OLED)	Auto		- Auto allows the monitor to automatically switch between USB input sources, such as keyboards, mice or other USB devices. - Users can also designate Upstream port or USB Type-C as the only USB signal source.							
	Upstream									
	Type C									
Smart Crosshair	Icon	None	- Through AI algorithm, this function enhances the visibility of in-game crosshair. - Users can select the color and position of the crosshair.							
										
	Color	White								
		Red								
		Auto								
	Position									
Reset										
Optix Scope	Scope Size	Small	- The center point will zoom in when Optix Scope is enabled. - Smart Crosshair and Optix Scope can be enabled at the same time. - Activating Optix Scope will affect: <table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Adaptive-Sync</td><td rowspan="2">Set to OFF</td></tr><tr><td>» PIP/PBP</td></tr><tr><td>» Screen Size 1:1</td><td>Set to Auto</td></tr></table>	Affected Function	Function Status	» Adaptive-Sync	Set to OFF	» PIP/PBP	» Screen Size 1:1	Set to Auto
		Affected Function		Function Status						
		» Adaptive-Sync		Set to OFF						
	» PIP/PBP									
	» Screen Size 1:1	Set to Auto								
	Medium									
	Large									
	Scope Ratio	x1.5								
x2										
x3										
OFF										
ON										

Gaming

1st Level Menu	2nd/3rd Level Menu		Description				
Game Mode	Premium Color		● Use Up or Down Button to select and preview mode effects. ● Press the OK Button to confirm and apply your mode type.				
	User						
	FPS						
	Racing						
	RTS						
	RPG						
Night Vision	OFF		● This function optimizes background brightness and is recommended for FPS games.				
	Normal						
	Strong						
	Strongest						
	A.I.						
AI Vision	OFF		● AI Vision enhances image quality by optimizing the contrast of images and background brightness. ● Activating AI Vision will affect: <table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Night Vision</td><td>Unable to select</td></tr></table>	Affected Function	Function Status	» Night Vision	Unable to select
	Affected Function	Function Status					
» Night Vision	Unable to select						
Refresh Rate	Location	Left Top	● Location is adjustable in OSD Menu. Press the OK Button to confirm and apply your Refresh Rate Location. ● This monitor follows and works at the Operating System' s preset Screen Refresh Rate.				
		Right Top					
		Left Bottom					
		Right Bottom					
		Customize					
	OFF						
	ON						
Alarm Clock	Location	Left Top	● After setting the time, press the OK Button to activate the timer. ● Users have to manually restore their preset Alarm Clock after any AC power loss and reconnection.				
		Right Top					
		Left Bottom					
		Right Bottom					
		Customize					
	OFF						
	15:00	00:01 ~ 99:59					
	30:00						
	45:00						
	60:00						

1st Level Menu	2nd/3rd Level Menu	Description							
Adaptive-Sync	OFF	- Adaptive-Sync prevents screen tearing. - Activating Adaptive-Sync will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» PIP/PBP</td><td rowspan="2">Set to OFF</td></tr><tr><td>» Optix Scope</td></tr><tr><td>» Screen Size 1:1</td><td>Set to Auto</td></tr></table>	Affected Function	Function Status	» PIP/PBP	Set to OFF	» Optix Scope	» Screen Size 1:1	Set to Auto
	Affected Function		Function Status						
	» PIP/PBP		Set to OFF						
	» Optix Scope								
» Screen Size 1:1	Set to Auto								
ON									
DSC	OFF	- Users can toggle DSC (Display Stream Compression) on/off. - For more DSC timing information, please check Preset Display Modes for DSC On/Off timing tables. - Activating DSC will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» PIP/PBP</td><td rowspan="2">Unable to select</td></tr><tr><td>» Screen Size 16:10</td></tr></table>	Affected Function	Function Status	» PIP/PBP	Unable to select	» Screen Size 16:10		
	Affected Function		Function Status						
	» PIP/PBP		Unable to select						
	» Screen Size 16:10								
ON									

Professional

1st Level Menu	2nd Level Menu	Description						
Pro Mode	Eco	• Use Up or Down Button to select and preview mode effects. • Press the OK Button to confirm and apply your mode type. • The default setting “Eco” mode meets the requirements of TÜV Rheinland’ s “Low Blue Light” standard and Eyesafe certification. • Activating sRGB, Adobe RGB, Display P3 will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Color Temperature</td><td rowspan="3">Unable to select</td></tr><tr><td>» Low Blue Light</td></tr><tr><td>» Contrast</td></tr></table>	Affected Function	Function Status	» Color Temperature	Unable to select	» Low Blue Light	» Contrast
	Affected Function		Function Status					
	» Color Temperature		Unable to select					
	» Low Blue Light							
	» Contrast							
	User							
	Anti-Blue							
	Movie							
Office								
sRGB								
Adobe RGB								
Display P3								
Low Blue Light	OFF	• Low Blue Light protects your eyes against blue light. When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow. • When Pro Mode is set to Anti-Blue, it is mandatory to enable Low Blue Light. • This monitor is a Low Blue Light backlight monitor, it would decrease the blue light emitted without adjusting OSD function.						
	ON							
Image Enhancement	OFF	• Image Enhancement enhances image edges to improve their acutance.						
	Weak							
	Medium							
	Strong							
	Strongest							

Image

1st Level Menu	2nd/3rd Level Menu		Description						
Brightness	0-100		Properly adjust Brightness according to the surrounding lighting.						
Contrast	0-100		Properly adjust Contrast to relax your eyes.						
Sharpness	0-5		Sharpness improves clarity and details of images.						
Color Temperature	Cool		- Use Up or Down Button to select and preview mode effects. - Press the OK Button to confirm and apply your mode type. - Users can adjust Color Temperature in Customization mode.						
	Normal								
	Warm								
	Customization	R (0-100)							
		G (0-100)							
B (0-100)									
Screen Size	Auto		- Users can adjust Screen Size in any mode, any resolution and any screen refresh rate. - Activating Screen Size 1:1 will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Adaptive-Sync</td><td rowspan="4">Set to OFF</td></tr><tr><td>» PIP/PBP</td></tr><tr><td>» Optix Scope</td></tr></table>  Important <i>Screen Size 1:1 refers to displaying content at its original resolution. This option is disabled when the monitor is set to its native resolution.</i>	Affected Function	Function Status	» Adaptive-Sync	Set to OFF	» PIP/PBP	» Optix Scope
	Affected Function	Function Status							
	» Adaptive-Sync	Set to OFF							
	» PIP/PBP								
	» Optix Scope								
	4:3								
	16:9								
	16:10								
1:1									
24.5"									
27"									
DisplayHDR	True Black 400		Users can set the DisplayHDR to True Black 400 or Peak 1000 nits.						
	Peak 1000 nits								

Input Source

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		Users can adjust Input Source in any mode.
HDMI™ 2		
DP		
Type C		
Auto Scan	OFF	- Users can use the Navi Key to select Input Source at below status: - While “Auto Scan” is set to “OFF” with the monitor at power saving mode; - While “No Signal” message box is shown on the monitor.
	ON	

PIP/PBP

1st Level Menu	2nd/3rd Level Menu		Description														
OFF			- PIP (Picture in Picture) allows users to simultaneously display multiple video sources on one screen. One program is displayed on the full screen at the same time as one or more other programs are displayed in inset windows. - PBP (Picture by Picture) is a similar feature that displays two input sources side-by-side on the screen. - Display Switch allows users to switch between primary and secondary input sources. - If there is only one signal input, the Display Switch and Audio Switch will be grayed out. - Users can adjust the ratio of window division by switching Mode 1/ 2/ Customize. - Activating PIP/PBP will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Adaptive-Sync</td><td>Set to OFF</td></tr><tr><td>» Optix Scope</td><td></td></tr><tr><td>» HDMI™ CEC</td><td>Set to OFF & unable to select</td></tr><tr><td>» DisplayHDR</td><td></td></tr><tr><td>» DSC</td><td>Unable to select</td></tr><tr><td>» Screen Size 1:1/ 16:10/ 24.5" / 27"</td><td>Set to Auto & unable to select</td></tr></table>	Affected Function	Function Status	» Adaptive-Sync	Set to OFF	» Optix Scope		» HDMI™ CEC	Set to OFF & unable to select	» DisplayHDR		» DSC	Unable to select	» Screen Size 1:1/ 16:10/ 24.5" / 27"	Set to Auto & unable to select
Affected Function	Function Status																
» Adaptive-Sync	Set to OFF																
» Optix Scope																	
» HDMI™ CEC	Set to OFF & unable to select																
» DisplayHDR																	
» DSC	Unable to select																
» Screen Size 1:1/ 16:10/ 24.5" / 27"	Set to Auto & unable to select																
PIP	Source	HDMI™ 1															
		HDMI™ 2															
		DP															
		Type C															
	PIP Size	Small															
		Medium															
		Large															
	Location	Left Top															
		Right Top															
		Left Bottom															
		Right Bottom															
		Customize															
	Display Switch																
Audio Switch																	
PBP	Mode 1																
	Mode 2																
	Customize																
	Source 1	HDMI™ 1															
		HDMI™ 2															
		DP															
		Type C															
	Source 2	HDMI™ 1															
		HDMI™ 2															
		DP															
Type C																	
Display Switch																	
Audio Switch																	

Navi Key

1st Level Menu	2nd Level Menu	Description
Up	OFF	All Navi Key items can be adjusted via OSD Menus.
Down	Brightness	
Left	Game Mode	
Right	Smart Crosshair	
G Key	Alarm Clock	
	Input Source	
	PIP/PBP Mode	
	Refresh Rate	
	Info. On Screen	
	Night Vision	
	Optix Scope	
	KVM (MPG 321CURX QD-OLED)	

Settings

1st Level Menu	2nd Level Menu	Description
Language	繁體中文	- Users have to press the OK Button to confirm and apply the Language setting. - Language is an independent setting. Users' own language setting will override the factory default. When users set Reset to Yes, Language will not be changed.
	English	
	Français	
	Deutsch	
	Italiano	
	Español	
	한국어	
	日本語	
	Русский	
	Português	
	简体中文	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	Users can adjust Transparency in any mode.

1st Level Menu	2nd Level Menu	Description
OSD Time Out	5~30s	Users can adjust OSD Time Out in any mode.
RGB LED (MPG 321CURX QD-OLED)	OFF	RGB LED offers unique lighting effects for your monitor.
	MSI - Mystic Light	
	RGB Brightness	
Power Button	OFF	When set to OFF, users can press the power button to turn off the monitor.
	Standby	When set to Standby, users can press the power button to turn off the panel and backlight.
Info. On Screen	OFF	The information of the monitor status will be shown on the right side of the screen.
	ON	
HDMI™ CEC	OFF	- HDMI™ CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series X S consoles and various audio-visual devices that are CEC-capable. - If HDMI™ CEC is set to ON: - The monitor will automatically power on when the CEC device is turned on. - The CEC device will enter power saving mode when the monitor is turned off. - When Sony PlayStation®, Nintendo® Switch™, or Xbox Series X S console is connected, Game Mode and Pro Mode will be automatically set to default modes and can be adjusted to users' preferred modes later.
	ON	
Type C PD Charge	OFF	This function enables users to charge their devices through a USB Type-C connector.
	ON	
Power LED	OFF	Users can toggle the Power LED on/off.
	ON	During the Panel Protect process, the power LED indicator will blink orange until the process is complete.
Reset	YES	Users can Reset and restore settings to original OSD Default in any mode.
	NO	

MSI OLED Care

1st Level Menu	2nd/3rd Level Menu		Description
Pixel Shift	Slow		Pixel Shift moves the pixels of your screen at regular intervals to reduce the possibility of screen burn-in or image retention.
	Normal		
	Fast		
Panel Protect			- To maintain panel image quality, panel protect function will automatically activate when monitor using over 4 hours. - This protect function may take several minutes to complete. - The power indicator will blink orange color until process done. - During process executing, please do not unplug the power cord from monitor. - During process executing, press power button again to cancel this function.
Protect Notice	Auto		- When set to Auto, Protect Notice will pop up when the panel exceeds 4 hours of cumulative usage. - When set to Usage 16 hrs, Protect Notice will pop up when the panel exceeds 16 hours of cumulative usage. - When Panel Protect is interrupted, Protect Notice will pop up upon next power-up.
	Usage 16 hrs		
Static Screen Detection	OFF		- If Static Screen Detection is set to ON: - When detecting static visuals over long periods of time, the monitor reduces brightness to prevent screen burn-in. - Once detecting moving visuals, the monitor restores its previous brightness setting.
	ON		
	Starting in	50 Sec	Starting in detects the time a static image remains on the screen.
		100 Sec	
	Time required	120 Sec	- Time required specifies the time for brightness reduction after detecting a static image for 50/100 seconds. - The brightness reduction level depends on the setting of Reducing Level.
		240 Sec	
	Reducing Level	1-7	- Users can select a level for brightness reduction. - Reducing effect depends on Brightness/ DisplayHDR setting.

1st Level Menu	2nd/3rd Level Menu		Description
Multi Logo Detection	OFF		This function helps prevent image sticking phenomenon. When set to ON, brightness reduction of multi logo areas will kick in if logos are detected.
	ON		
	Reducing Level	1-2	- Users can select a level for brightness reduction. - Reducing effect depends on Brightness/ DisplayHDR setting.
Taskbar Detection	OFF		This function helps prevent image sticking phenomenon. When set to ON, brightness reduction of taskbar areas will kick in if taskbars are detected.
	ON		
	Reducing Level	1-3	- Users can select a level for brightness reduction. - Reducing effect depends on Brightness/ DisplayHDR setting.
Boundary Detection	OFF		This function helps prevent image sticking phenomenon. When set to ON, brightness reduction of boundary areas will kick in if boundaries, such as letters, pillars and vertical lines, are detected.
	ON		
	Reducing Level	1-3	- Users can select a level for brightness reduction. - Reducing effect depends on Brightness/ DisplayHDR setting.
OLED Panel Info.			This field shows the information of MSI OLED Care.

Specifications

Monitor	MAG 321CUP QD-OLED		MPG 321CURX QD-OLED	
Size	31.5 inch			
Curvature	1700R			
Panel Type	QD-OLED			
Resolution	3840x2160 (UHD)			
Aspect Ratio	16:9			
Brightness	• Typical SDR: 250 nits • Peak HDR: 1000 nits			
Contrast Ratio	1500000:1			
Refresh Rate	165Hz		240Hz	
Response Time	0.03ms (GTG)			
I/O	• 2 x HDMI™ Connector • 1 x DisplayPort • 1 x USB Type-C Port • 1 x Headphone Jack		• 2 x HDMI™ Connector • 1 x DisplayPort • 1 x USB Type-C Port • 2 x USB 2.0 Type-A Port • 1 x USB 2.0 Type-B Upstream Port • 1 x Headphone Jack	
View Angles	178°(H) , 178°(V)			
DCI-P3* / sRGB	99% / 138%			
Surface Treatment	Anti-Reflection			
Display Colors	1.07B (10 bits)			
Monitor Power Options	100-240V, 50/60Hz, 2.7A		100-240V, 50/60Hz, 3.5A	
Power Consumption (Typical)	Power On < 180W Standby < 0.5W Power Off < 0.3W		Power On < 290W Standby < 0.5W Power Off < 0.3W	
Adjustment (Height)	0 ~ 100mm			
Adjustment (Tilt)	-5° ~ 15°			
Adjustment (Swivel)	-30° ~ 30°			
Kensington Lock	Yes			

Monitor		MAG 321CUP QD-OLED	MPG 321CURX QD-OLED
VESA Mounting		• Plate Type: 100 x 100 mm • Screw Type: M4 x 10 mm • Thread Diameter: 4 mm • Thread Pitch: 0.7 mm • Thread Length: 10 mm	
Dimension (W x H x D)		714 x 473 x 318 mm	
Weight	Net	8.0 kg	8.4 kg
	Gross	11.3 kg	11.9 kg
Environment	Operating	• Temperature: 0°C to 40°C • Humidity: 20% to 90%, non-condensing • Altitude: 0 ~ 5000m	
	Storage	• Temperature: -20°C to 60°C • Humidity: 10% to 90%, non-condensing	

* Based on CIE1976 test standards.

Preset Display Modes



- All information is subject to change without prior notice.
- HDMI™ VRR (Variable Refresh Rate) synchronizes with Adaptive-Sync (ON/ OFF). For VRR ON/OFF status, please check Adaptive-Sync.

Standard Default Mode (DSC On)

MAG 321CUP QD-OLED					
Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@120Hz		V	V
		@165Hz	V	V	V
Video Timing Resolution	720P		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

MPG 321CURX QD-OLED					
Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@120Hz		V	V
		@180Hz	V	V	V
		@240Hz	V	V	V
Video Timing Resolution	720P		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
HDMI™ VRR			V		

Standard Mode (DSC Off)

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@120Hz		V	V
Video Timing Resolution	720P		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@30Hz	V		
		@60Hz	V		
		@120Hz	V		
HDMI™ VRR		V			

PIP Mode (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
QHD	2560x1440	@60Hz	V	V	V
		@120Hz	V	V	V
UHD	3840x2160	@60Hz	V	V	V
		@120Hz	V	V	V
Video Timing Resolution	720P		V	V	V
	1080P	@60Hz	V	V	V
		@120Hz	V	V	V
	2160P	@30Hz	V	V	
		@50Hz	V	V	
		@60Hz	V	V	
		@120Hz	V	V	V

PBP Mode 1 (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720P		V	V	V
Used for PBP Full Screen	2880x2160	@60Hz	V	V	V
	960x2160	@60Hz	V	V	V

PBP Mode 2/Customize (Not Support HDR)

Standard	Resolution		HDMI™	DP	USB-C
Video Timing Resolution	720P		V	V	V
Used for PBP Full Screen	1920x2160	@60Hz	V	V	V

Screen Size 16:10 (Not Support HDR)

MAG 321CUP QD-OLED					
Standard	Resolution		HDMI™	DP	USB-C
QHD+	2560x1600	@60Hz	V	V	V
		@120Hz	V	V	V

MPG 321CURX QD-OLED					
Standard	Resolution		HDMI™	DP	USB-C
QHD+	2560x1600	@60Hz	V	V	V
		@120Hz	V	V	V
		@144Hz	V	V	V
		@240Hz	V	V	V

Troubleshooting

The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

The screen image is not properly sized or centered.

- Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

Safety Instructions

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the device.
 - The device has been exposed to moisture.
 - The device does not work well or you can not get it working according to the User Guide.
 - The device has dropped and damaged.
 - The device has obvious sign of breakage.

TÜV Rheinland Certification

TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



Low Blue Light
(Hardware
Solution)

www.tuv.com

- Place the screen 20 – 28 inches (50 – 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.

TÜV Rheinland Flicker Free Certification

- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword “Flicker Free” confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 - 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)



Flicker Free

www.tuv.com

Regulatory Notices

CE Conformity

This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:



- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA

(626) 913-0828

www.msi.com

WEEE Statements

European Union: This symbol on the product indicates that this product cannot be discarded as municipal waste. Instead, it is your responsibility to dispose of your waste electrical and electronic equipment by handing it over to a designated collection point for recycling. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at:
<https://csr.msi.com/global/index>

RoHS Statement

Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

<https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations>

India RoHS

This product complies with the “India E-waste (Management and Handling) Rule 2016” and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

Turkey EEE Regulation

Conforms to the EEE Regulations of the Republic Of Turkey

Ukraine Restriction of Hazardous Substances

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.
- Visit the MSI website <https://csr.msi.com/global/pevn_ewaste> and locate a nearby distributor for further recycling information.
- Please visit <<https://us.msi.com/page/recycling>> for information regarding the recycling of your product in the US.



Warning!

Overuse of screens is likely to affect eyesight.

Recommendations:

1. Take a 10-minute break for every 30 minutes of screen time.
2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

Copyright and Trademarks Notice

msi

MSI

微星

微星科技
MICRO-STAR INTERNATIONAL



Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit <https://www.msi.com/support/> for further guidance.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda MSI, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/msi-zakrivljeni-monitor-32-qd-oled-mpg-321curx-akcija-cena/>