

Informacije o proizvodu (EN)

LENOVO laptop ThinkPad T16 G2 (21HH003BCX)

Lenovo




Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://tehnoteka.rs/p/lenovo-laptop-thinkpad-t16-g2-21hh003bcx-akcija-cena/>

OVERVIEW

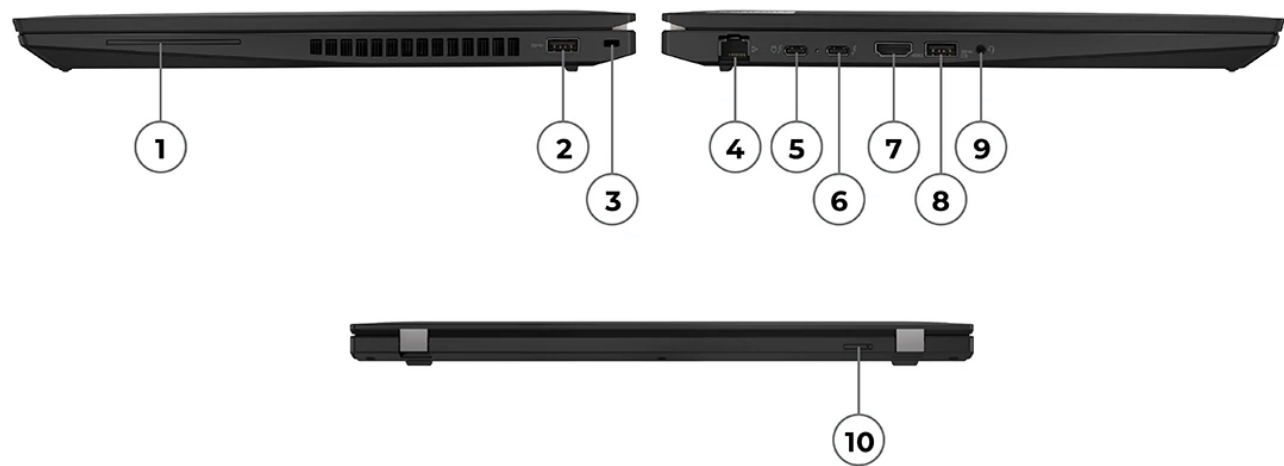

1. Smart card reader *	6. Thunderbolt 4
2. USB 3.2 Gen 1	7. HDMI
3. Kensington Nano Security Slot	8. USB 3.2 Gen 1 (Always On)
4. Ethernet (RJ-45)	9. Headphone / microphone combo jack (3.5mm)
5. Thunderbolt 4	10. Nano-SIM card slot *

- Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or P Series Core™ i5 / i7 Processor

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1340P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1345U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics
Core™ i5-1350P	12 (4 P-core + 8 E-core)	16	P-core 1.9GHz / E-core 1.4GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1360P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 5.0GHz / E-core 3.7GHz	18MB	Intel® Iris® Xe Graphics
Core™ i7-1365U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 5.2GHz / E-core 3.9GHz	12MB	Intel® Iris® Xe Graphics
Core™ i7-1370P	14 (6 P-core + 8 E-core)	20	P-core 1.9GHz / E-core 1.4GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	Intel® Iris® Xe Graphics

Notes:

^[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.
Intel® P series processors are for special bid only.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 IoT Enterprise LTSC 2021^[1]
- Ubuntu Linux^[2]
- Linux^[3]
- No preload operating system

Notes:

^[1] Windows® 10 IoT Enterprise LTSC 2021 is for special bid only.
^[2], ^[3] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Key Features
Intel® Iris® Xe Graphics ^[1]	Integrated	Shared	DirectX® 12.1
NVIDIA® GeForce MX550 ^[2]	Discrete	4GB GDDR6	DirectX® 12

Notes:

^[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with

single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.
[2] Discrete graphics is available only with Intel® P series processors.

Monitor Support

Monitor Support^[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt™ supports up to 5K@60Hz
- HDMI® supports up to 4K@60Hz

Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

- Models with DDR4 memory: up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Models with DDR5 memory: up to 32GB (16GB soldered + 16GB SO-DIMM) DDR5-5200
- Models with 16GB LPDDR5x: 16GB soldered memory, not upgradable
- Models with 32GB LPDDR5x: 32GB soldered memory, not upgradable

Memory Slots**

- Models with DDR4 memory: one memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable
- Models with DDR5 memory: one memory soldered to systemboard, one DDR5 SO-DIMM slot, dual-channel capable
- Models with LPDDR5x memory: memory soldered to systemboard, no slots, dual-channel

Memory Type**

- DDR4-3200 (models with integrated graphics)
- DDR5-5200 (models with integrated graphics)^[2]
- LPDDR5x-4800 (models with discrete graphics)^[3]

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.
[2] Installed memory is actually DDR5-5600 but run as DDR5-5200 due to platform limitation.
[3] Installed memory is actually LPDDR5x-7500 but run as LPDDR5x-4800 due to platform limitation.

Storage

Storage Support^[1]

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type**

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™

Microphone

- Dual-microphone array, 360° far-field, Dolby Voice®
- No microphone^[1]

Camera**

- 5.0MP + IR discrete, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- HD 720p, with privacy shutter, fixed focus
- No camera^[2]

Notes:

[1] No microphone is for special bid only.

[2] No camera is for special bid only.

Battery

Battery**

- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W or 135W AC adapter
- Integrated Li-Polymer 86Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 135W AC adapter

Battery Life^[1]

Configuration 1 (max battery life)

MobileMark® 25: up to 10.0 hr @250nits

JEITA 2.0: up to 18.5 hr @150nits

Local video playback: up to 16.9 hr @150nits

Alternate configuration 2

MobileMark® 25: up to 9.2 hr @250nits

JEITA 2.0: up to 19.5 hr @150nits

Local video playback: up to 17.1 hr @150nits

Alternate configuration 3

MobileMark® 25: up to 7.0 hr @250nits

JEITA 2.0: up to 13.0 hr @150nits

Local video playback: up to 12.3 hr @150nits

Notes:

[1] Configuration 1 (max battery life): WUXGA (non-touch), Intel® i5-1340P, 16GB soldered DDR5, Win 11, 52.5Wh battery, best power efficiency power mode

Alternate configuration 2: WUXGA low power (non-touch), Intel® i5-1335U, 16GB soldered DDR5, Win 11, 52.5Wh battery, best power efficiency power mode

Alternate configuration 3: WUXGA (touch), Intel® i5-1350P, 16GB soldered DDR5, Win 11, 52.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter**^[1]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

- 135W USB-C® slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter^[2]

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

DESIGN

Display

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	None	IPS ^[1]	300nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	-
16"	WUXGA (1920x1200)	Multi-touch	IPS ^[2]	300nits	Anti-glare	16:10	800:1	45% NTSC	85°/85°/85°/85°	-
16"	WUXGA (1920x1200)	None	IPS ^[3]	400nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	Low power, Eyesafe® Certified 2.0
16"	WUXGA (1920x1200)	Multi-touch	IPS ^[4]	500nits	Anti-glare	16:10	1000:1	100% sRGB	85°/85°/85°/85°	ThinkPad® Privacy Guard
16"	WQUXGA (3840x2400)	None	OLED	400nits	Anti-reflection, anti-smudge	16:10	100,000:1	100% DCI-P3	87.5°/87.5°/87.5°/87.5°	DisplayHDR™ True Black 500, Dolby Vision®, Eyesafe® Certified 2.0

Touchscreen

- On-cell multi-touch, supports 10-point touch
- Non-touch

Notes:

[1], [2], [3], [4] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 67.7 x 115 mm (2.67 x 4.53 inches)

Mechanical

Models	Dimensions
Integrated graphics models	361.9 x 255.5 x 20.5 mm (14.25 x 10.06 x 0.81 inches)
Discrete graphics models	361.9 x 255.5 x 21.1 mm (14.25 x 10.06 x 0.83 inches)

Models	Weight
Models with thunder black cover and integrated graphics	Starting at 1.68 kg (3.70 lbs)

Models with storm grey cover and integrated graphics	Starting at 1.71 kg (3.75 lbs)
Models with discrete graphics	Starting at 1.74 kg (3.84 lbs)

Case Color**

- Storm grey
- Thunder black

Case Material**

- Storm grey models: aluminium (top), aluminium (bottom)
- Thunder black models: carbon fiber hybrid (top), PPS (bottom)

Notes:

- [1] The system dimensions may vary depending on configurations.
- [2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet**

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®**[1]

- Qualcomm® Wi-Fi® 6E NFA725A, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM05-G, 4G LTE CAT4, M.2 card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- No support

SIM Card

No physical SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

- [1] Wi-Fi® 6E full features might be limited by country-level restrictions.
- Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.
- 6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.
- Bluetooth® 5.3 operation requires Windows® 11. For more information please visit [General Bluetooth® Support Information on Microsoft®](#).

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt™ 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Docking

Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T16 Gen 2 \(Intel®\)](#)

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe® password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Self-healing BIOS

Other Security

- (Optional) IR camera for Windows® Hello (facial recognition)
- (Optional) Camera privacy shutter
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix®
- Ultrasonic Human Presence Detection (IR camera models)

MANAGEABILITY

System Management

System Management**

- Intel® vPro® Enterprise^[1]
- Intel® vPro® Essentials^[2]
- Non-vPro®

Notes:

[1], [2] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ACCESSORIES

Bundled Accessories

Bundled Accessories***^[1]

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- Lenovo® USB-C® to VGA Adapter
- None

Notes:

^[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® T16 Gen 2 \(Intel®\)](#).

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

^[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ENVIRONMENTAL

Sustainability

Material

50% recycled aluminium on storm grey top cover
55% recycled aluminium on storm grey bottom cover
90% recycled magnesium on keyboard frame
95% PCC recycled plastic used in speaker enclosure
97% PCC recycled plastic used in the 52.5Wh and 86Wh battery frame
90% PCC recycled plastic used in standard 45W, 65W and 135W adapters
Low-temperature solder
Standard packaging: 90% plastic free packaging
Bulk packaging: 90% recycled and FSC certified content

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered^[3]
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit epeat.net and energystar.gov for more information.

[3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications**Mil-Spec Test**

MIL-STD-810H military test passed

Other Certifications

(Optional) Eyesafe® Certified 2.0

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Lenovo, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/lenovo-laptop-thinkpad-t16-g2-21hh003bcx-akcija-cena/>