

Uputstvo za upotrebu (EN)

TENDA TEG1024D switch



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:


<https://tehnoteka.rs/p/tenda-teg1024d-switch-akcija-cena/>

Tenda

Installation Guide

16-Port Gigabit Ethernet Switch/
24-Port Gigabit Ethernet Switch


TEG1016D/TEG1024D

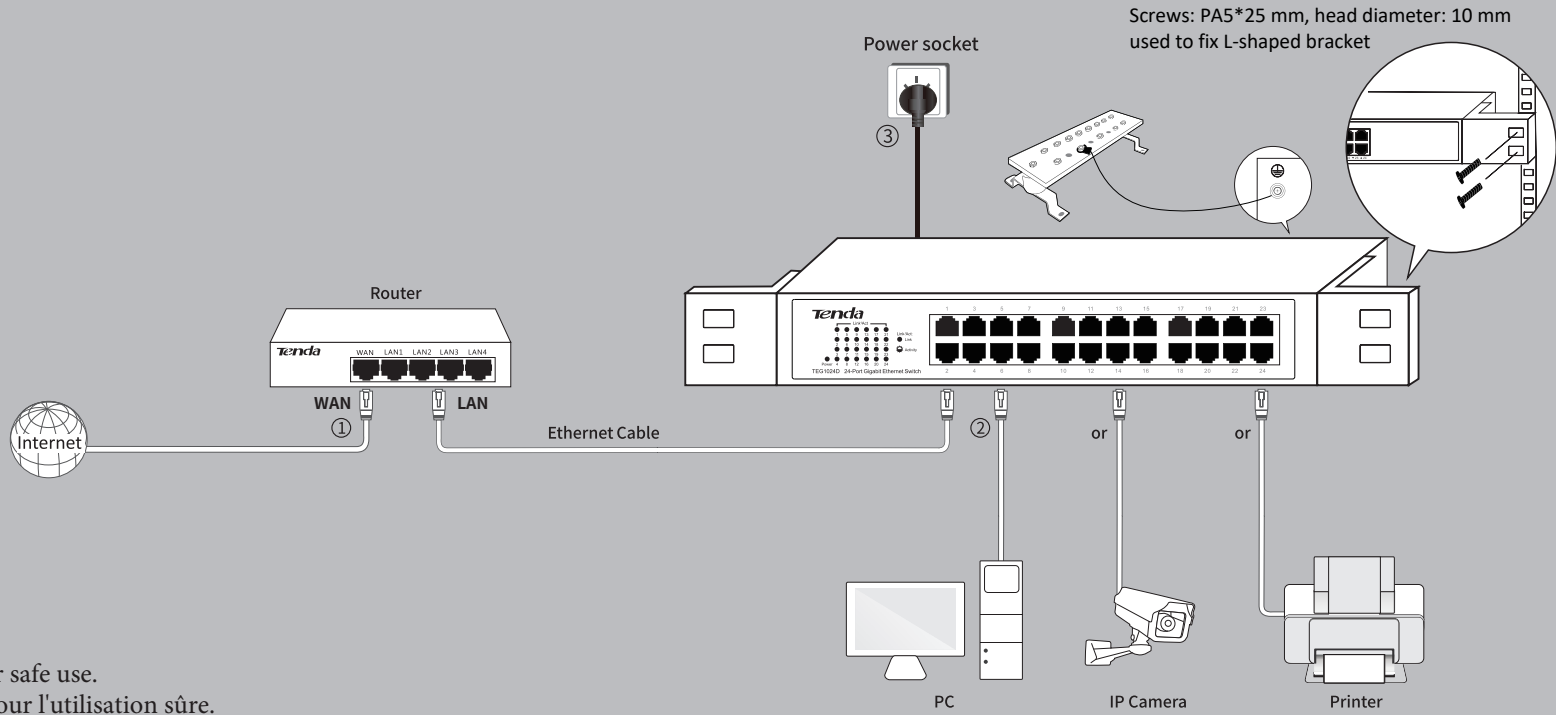

*The switch must be horizontally mounted for safe use.
*Le switch doit être monté horizontalement pour l'utilisation sûre.

English


Product Overview

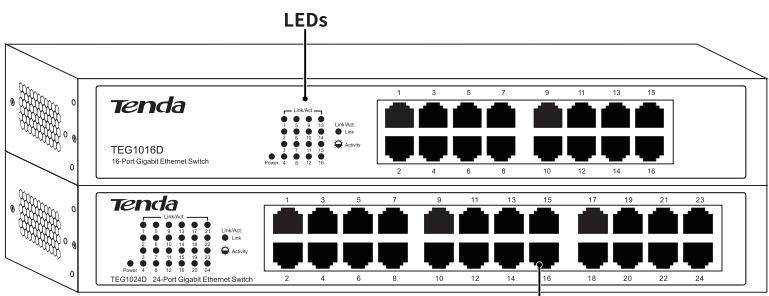

LED	Status	Description
POWER	ON	Power supply is provided to the device properly.
	OFF	Power supply is not provided to the device properly.
Port 1-16/24	Solid	Indicates the corresponding port is connected.
	OFF	Indicates no connection is established.
	Blinking	Indicates the corresponding port is connected and transferring data.

Português


Visão Geral do Produto

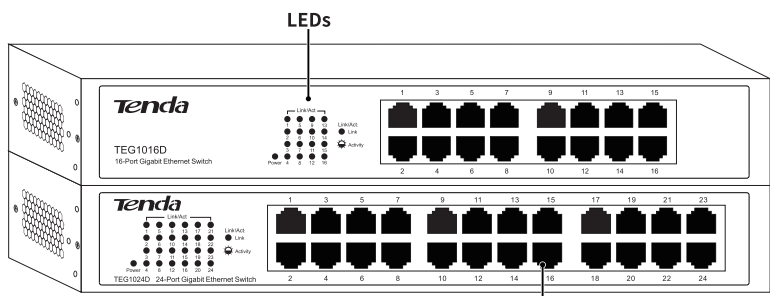

LED	Estado	Descrição
Energia	Ligar	Fonte de alimentação é fornecida para o dispositivo corretamente.
	Desligar	Fonte de alimentação não está prevista o dispositivo corretamente.
Porte 1-16/24	Sólido	Indica que o porte correspondente está ligado.
	Desligar	Indica que não há conexão é estabelecida.
	Piscando	Indica que o porte correspondente é ligado e a transferência de dados.

Español


Descripción del producto

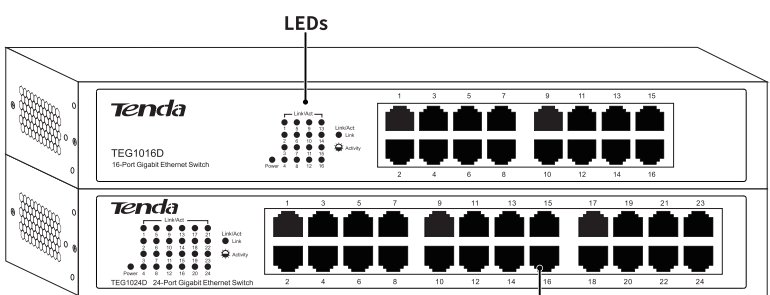

LED	Estado	Descripción
Energía	Encendido	La fuente de alimentación se proporciona para el dispositivo adecuado.
	Apagado	La fuente de alimentación no se proporciona para el dispositivo adecuado.
Puerto 1-16/24	Sólido	Indica que el puerto correspondiente está conectado.
	Apagado	Indica que se ha establecido ninguna conexión.
	Parpadeo	Indica que el puerto correspondiente está conectado y transfiriendo los datos.

Italiano


Panoramica del prodotto

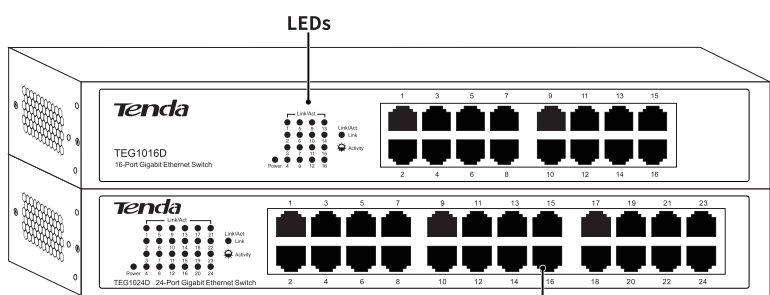

LED	Stato	Descrizione
Alimentazione	Accesso	L'alimentazione per il dispositivo è fornita correttamente.
	Spento	L'alimentazione per il dispositivo non è fornita correttamente.
Porta 1-16/24	Solido	Indica che la porta corrispondente è collegata.
	Spento	Indica che nessuna connessione è stabilita.
	Lampeggiante	Indica che la porta corrispondente è collegata e sta trasferendo dati.

Français


Présentation du produit

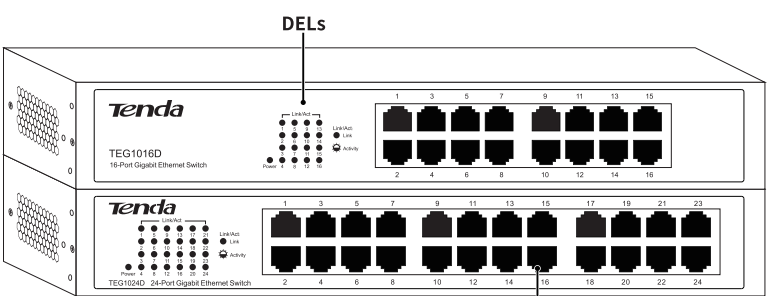

LED	Etat	Description
Puissance	Allumée	L'alimentation est bien fournie pour le dispositif.
	Eteint	L'alimentation n'est pas encore fourni pour dispositif.
Porta 1-16/24	Solide	Indique que le port correspondant est bien connecté.
	Eteint	Indique que aucune connexion n'est établie.
	Clignotant	Indique que le port correspondant est connecté et en train de transmettre les données.

Polski


Przegląd produktów

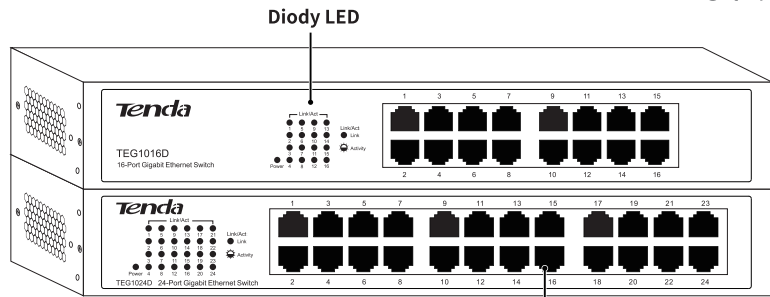

LED	Status	Opis
Moc	Włączac	Zasilanie jest normalne.
	Wyłącz	Zasilanie nie jest normalne.
Porty 1-16/24	Staly	Wskazuje, że port połączenia.
	Wyłącz	Wskazuje na brak portu połączenia.
	Migotanie	Wskazuje, że port połączenia i transferu danych.

Русский


Краткая информация о продукте

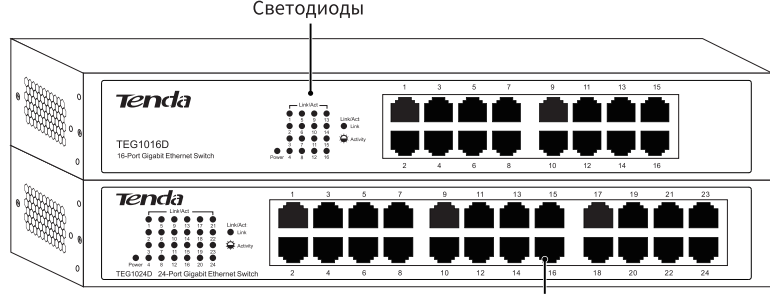

ВЕТОДИ	Состояние	Описание
Источник питания	Вкл	Электрическое питание подается на устройство должным образом.
	Выкл	Электрическое питание не подается на устройство должным образом.
Порт 1-16/24	Непрерывный	Указывает на подключение соответствующего порта.
	Выкл	Указывает на отсутствие подключения.
	Мигающий	Указывает на подключение соответствующего порта и передачу информации.

Türkçe

Ürüne Genel Bakış

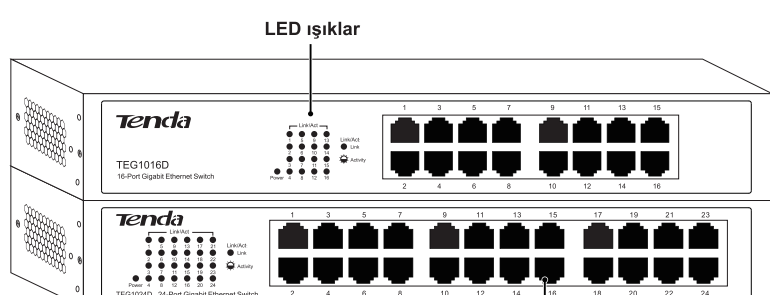

LED	Durum	Tanım
Güç	Açık	Güç kaynağı normaldir.
	Kapalı	Güç kaynağı normal değil.
Bağlantı Noktası 1-16/24	Sürekli Yanıyor	Yuvaya kablo bağlı olduğunu gösterir.
	Kapalı	Bağlantı olmadığını gösterir.
	Yanıp Sönüyor	Yuvaya kablunun bağlı ve data transferi olduğunu gösterir.

Safety and Emission Statement



CE Mark Warning

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.
The mains plug is used as disconnect device, the disconnect device shall remain readily operable.
NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.




RECYCLING

his product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.
User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.



Magyar


Termék áttekintés

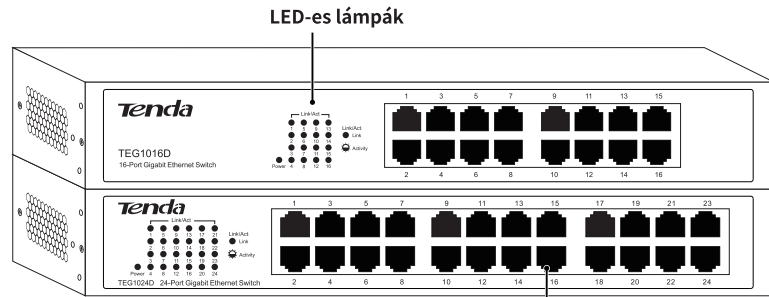

LED	Státusz	Leírás
Teljesítmény	Bekapcsol	Tápellátás normális.
	Leállítja	Tápellátás nem normális.
Portok 1-16/24	Szilárd	Jelzi, hogy az adott port csatlakozott.
	Leállítja	Jelzi, hogy a kapcsolat nem jött létre.
	Vibrálás	Jelzi, hogy az adott port csatlakoztatva van és adatátvitel folyik.

Română

Prezentarea produsului

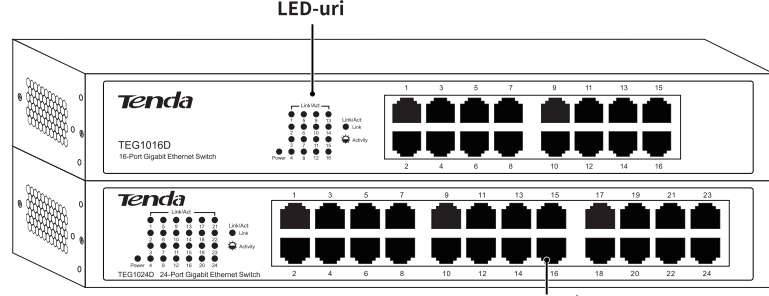

LED	Stare	Descriere
Putere	Pornire	Dispozitivul este alimentat corespunzator.
	Oprire	Dispozitivul nu este alimentat corespunzator.
Porturi 1-16/24	Solid	Portul corespondent este conectat.
	Oprire	Nicio conexiune nu a fost stabilita.
	luminare intermitenta	Portul corespondent este conectat si transferul de date este activ.

Specifications	TEG1016D	TEG1024D
Standard	IEEE 802.3/uj/x/ab	
Interface	16*10/100/1000Mbps auto-negotiation RJ 45 ports (Auto MDI/MDIX)	24*10/100/1000Mbps auto-negotiation RJ 45 ports (Auto MDI/MDIX)
Transmission Media	10BASE-T: UTP category 3, 4, 5 cable 100BASE-TX: 100BASE-TX: UTP category 5, 5e or Better	
Forwarding Rate	10Mbps: 14880pps 100Mbps: 148800pps	1000Mbps: 1488000pps
LEDs	16*10/100/1000Mbps Link/Act, 1*power	24*10/100/1000Mbps Link/Act, 1*power
Transmission Method	Store-and-Forward MAC auto Learning & Auto Aging	
Advance Feature	Supports 10K jumbo frame Power adapter with 6Kv lightning proof, Ports with 6Kv lightning proof	
Switching Capacity	32Gbps	48Gbps
Mac Address Table	8K	
Power Information	AC 100V-240V 0.4A 50/60Hz	AC 100V-240V 0.7A 50/60Hz
Dimensions	294*180*44mm	
Operating Environment	Temperature	0°C~45°C
	Humidity	10%~90% non-condensing
Storage Environment	Temperature	-40°C~70°C
	Humidity	5%~90% non-condensing



FCC Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: (1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. (2) To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

Technical Support

Shenzhen Tenda Technology Co., Ltd.
Floor 6-8, Tower E3, No.1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
USA hotline: 1-800-570-5892
Toll Free: 7 x 24 hours
Canada hotline: 1-888-998-8966
Toll Free: Mon - Fri 9 am - 6 pm PST
Hong Kong hotline: 00852-81931998
Global hotline: +86 755-2765 7180 (China Time Zone)
Website: www.tenda.cn
E-mail: support@tenda.com.cn

Copyright

©2021 Shenzhen Tenda Technology Co., Ltd. All rights reserved.
Tenda is a registered trademark legally held by Shenzhen Tenda Technology Co., Ltd. Other brand and product names mentioned herein are trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice.

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Tenda, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://tehnoteka.rs/p/tenda-teg1024d-switch-akcija-cena/>