
tehnoteka

https://tehnoteka.rs

# Informacije o proizvodu (EN)

## BOSCH ugradna ploča PVQ811H26E

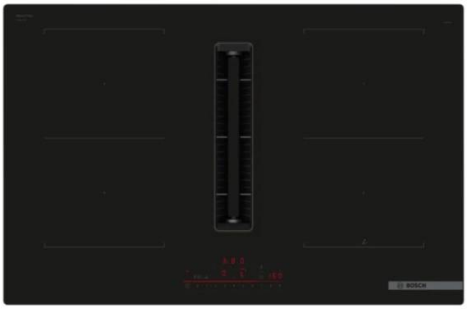


Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

https://tehnoteka.rs/p/bosch-ugradna-ploca-pvq811h26e-akcija-cena/

# Series 6, Induction hob with integrated ventilation system, 80 cm, surface mount without frame PVQ811H26E

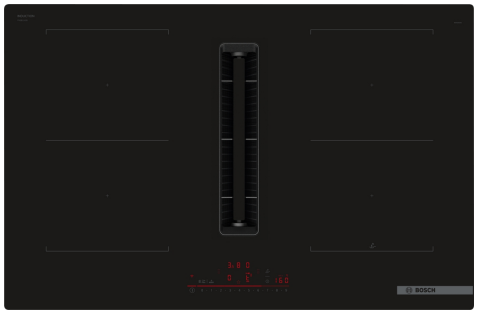













1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

HEZ32WA00 Wireless food thermometer, HEZ390090 Wok Set consisting of 3 Items, HEZ9CF240 Fry pan, coated 24cm Ø, HEZ9CF280 Fry pan, coated 28cm Ø, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9SE030 Set of 2 pots and 1 pan, HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9VDKE1 Exhaust kit, HEZ9VDKR0 Recirculation kit 2 L-bow (70cm), HEZ9VDKR1 Recirculation kit S and L-bow (60cm), HEZ9VDKR2 Recirculation kit 1x L-bow, HEZ9VDSB1 90° flat duct bend horizontal, HEZ9VDSB2 90° flat duct L vertical, HEZ9VDSB3 90° flat duct M vertical, HEZ9VDSB4 90° flat duct S vertical, HEZ9VDSI0 Adapter round-flat, HEZ9VDSI1 90° Adapter round-flat, HEZ9VDSM1 Straight tube 500mm, HEZ9VDSM2 Straight tube 1000mm, HEZ9VDSS1 Connector sleeve (female), HEZ9VDSS2 Flex sleeve (female), HEZ9VEDU0 Acoustics Filter, HEZ9VRCR1 Clean Air Plus odor filter (replacement), HEZ9VRPD1 Plinth Diffusor

## The induction hob with integrated ventilation module: combines induction with ventilation technology for perfect results.

- **DirectSelect**: easy selection of cooking zone, power level and additional functions.
- **Combi Zone**: combine two induction cooking zones to heat large cookware.
- **AutoOn function**: ventilation turns on automatically when the hob heats up.
- **PerfectFry Plus**: no more worrying about scorching.
- **Favourite Button**: personalize your hob with Home Connect.

Product name/family: ..... Cooking zone ceramic
Built-in / Free-standing: ..... Built-in
Energy input: .....Electric
Total number of positions that can be used at the same time: ..... 4
Required niche size for installation (HxWxD): .....223 x 750-750 x 490-490 mm
Width of the appliance: .....802 mm
Dimensions: ..... 223x802x522 mm
Dimensions of the packed product (HxWxD): ..... 431 x 950 x 672 mm
Net weight: .....25.3 kg
Gross weight: ..... 30.0 kg
Residual heat indicator: .....yes
Location of control panel: ..... Front
Basic surface material: .....Ceramic
Color of surface: .....Black
Length electrical supply cord: .....110 cm
Sealed Burners: .....No
Power Boost: .....All cooking zones
Power of 2nd heating element (kW): .....3600.0 W
Number of speed settings: .....9-stage + 2 intensive
Max. air extraction: ..... 500 $m^3/h$
Boost position output recirculating: .....595.0 $m^3/h$
Max. air recirculation: ..... 487 $m^3/h$
Boost position air extraction: ..... 622 $m^3/h$
Noise level: .....69 dB(A) re 1 pW
Odour filter: ..... No
Clean filter reminders: .....Yes
Voltage: .....220-240/380-415 V
Frequency: ..... 50-60 Hz
Included accessories: 1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter

4 242005 433612

# Series 6, Induction hob with integrated ventilation system, 80 cm, surface mount without frame PVQ811H26E

## The induction hob with integrated ventilation module: combines induction with ventilation technology for perfect results.

- 80 cm: space for 4 pots or pans.

**Flexibility of cooking zones**

- 2 CombiZones
- : use bigger cookware by connecting two classic cooking zones into one large zone.
- Cooking zone front left: 190 mm, 210 mm, 2.5 KW (max. power 3.7 KW)
- Cooking zone rear left: 190 mm, 210 mm, 2.5 KW (max. power 3.7 KW)
- Cooking zone rear right: 190 mm, 210 mm , 2.5 KW (max power 3.7 KW)
- Cooking zone front right: 210 mm, 190 mm, 2.5 KW (max. power 3.7 KW)

**Usage convenience**

- 17 power levels: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- via HC app/MyButton: keep dishes warm at preset low power level.

**Time saving & efficiency**

- PowerBoost function for all zones
- : boil water more quickly thanks to 50% more energy than at the highest standard level.
- via HC app/MyButton: heat up pans more quickly than at the highest standard level while protecting the pan coating.
- QuickStart Function: when switching on, the hob automatically selects the cooking zone with cookware (placed in off-mode).
- ReStart Function: in case of unintentional switch-off, restore all previous settings by switching on the hob again within 4 seconds.

**Cooking assistance**

- 11 frying levels: prevents scorching with the automatic temperature regulation of the integrated sensor.
- Dish assistant: easily find the right temperature setting for a certain dish via the home connect app.

**Connectivity**

- Home Connect (only in countries where Home Connect service is available: check if the hob is switched off even when not at home, and find recipes or additional functions in the Home Connect app.

**Design**

- frameless

**Safety**

- 2 stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the hob.
- Main switch: switch off all cooking zones at the touch of a button.
- Safety switch-off: for safety reasons, heating stops after a preset time without interaction (customizable).

**Installation**

- Dimensions of the product (HxWxD mm): 223 x 802 x 522
- Required niche size for installation (HxWxD mm) : 223 x 750 x (490 - 490)
- Min. worktop thickness: 16 mm
- Connected load: 7400 W
- PowerManagement Function: limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 110 cm, Cable included

**Accessories**

- Clean Air Plus odor filter, Slider for unducted recirculation included
- Installation into 60 cm floor cupboard possible

**Integrated ventilation downdraft system**

- Induction cooktop with fully integrated high-performance downdraft extractor.
- Suitable for ducted or recirculated extraction configuration (incl. differentiated software modes). Respective mandatory installation acessories required:
- Aesthetically integrated fully flush air intake design with floating, heat resistant glass ceramics element for free movement and placement of cookware.
- - Automatic switch-on of ventilation system when a cooking zone is used.
- - Automatic delayed shut-off after cooking to erase residual odors after cooking (in specific ultra low-noise fan level, 12min in ducted extraction, 30min in recirculated extraction, can be shut-off manually).
- High-performance, low-noise blower with energy-effcienct BLDC-technology. High extraction rates at very low noises with pleasant noise frequencies through psycho-acoustically and aerodynamically optimized interieur with enclosed, non-visible blower. Highly pressuredrop resistant even with longer and more complex ductings.
- Easy-to-detach and easy-to-clean grease filter and liquid collector unit:
- - Convenient one-hand removal of unit via floating glass ceramics handle.
- - Integrated, large-scale, high performance stainless-steel grease filters with 12 filtration layers and one black top layer for enhanced aesthetical integration. Grease filtration efficiency of 94 %.
- - All parts of the unit are easy-to-clean, fully dishwasher safe and heat resistant.
- - (Upper) Liquid collector unit with 200ml of capacity for standard accidental spillages or cooking condensate.
- - Powerful drainage system for spillages that exceed 200ml of liquids.
- - Liquid safety collector with additional capacity of 700ml for more severe accidental situations. Dishwasher safe. Easily accessible and detachable from below.
- - Overall capturing capacity of 900ml (200ml + 700ml).
- - Watertight blower system.
- Ventilation system performance:
- - Extraction performance in ducted extraction (according to EN 61591): min. normal setting 154 m3/h , max. normal setting 500 m3/h , max. Boost-/Intensive setting 622 m3/h .
- - Extraction performance in recirculated extraction (according to EN 61591): min. normal setting 117 m3/h , max. normal setting 487 m3/h , max. Boost-/Intensive setting 595 m3/h.
- - Noise level in ducted extraction (Sound power level according to

EN 60704-3): min. normal setting 42 dB  re 1 pW, max. normal setting 69 dB  re 1 pW, max. Boost-/Intensive setting 74 dB  re 1 pW.


- - Noise level in recirculated extraction (Sound power level according to EN 60704-3. ): min. normal setting 41 dB  re 1 pW, max. normal setting 68 dB  re 1 pW, max. Boost-/Intensive setting 72 dB  re 1 pW.
- - Grease filter efficiency (according to EN 61591) 94 %.
- Consumption data and energy efficiency (according to Regulation (EU) No 65/2014):
- - Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D).
- - Fluid Dynamic Efficiency: A .
- - Grease filtration efficiency class: B .
- - Noise min. normal setting & max. normal setting: 42 dB  & 69 dB .
- 2 x 2 battery of directly integrated, high-performance cleanAir odor filters (in recirculation configuration).
- - Optimized odor reduction performance for cooking applications with complex odor molecules (e.g. fish).
- - Large scale filter surface with high odor reduction capabilities.
- - Lifetime of 360 hours of cooking (non-regenerative).
- - Low-noise filters with optimized psycho-acoustics.
- - Easy-to-access and easy-to-remove from above.
- - Replenishment cleanAir filter set HEZ9VRCR0.
- For ducted extraction configuration: 2 x 2 Battery of directly integrated, high-performance low-noise acoustic filters for significantly lower noise and improved psycho-acoustics.

**Planning & installation notes**

- Suitable for ducted or recirculated extraction installations. Respective mandatory installation acessories required:
- - HEZ9VRPD0 for fully ducted and partly-ducted recirculation with cleanAir odor filters. Starter kit HEZ9VRUD0 for unducted recirculation with cleanAir odor filters.
- - HEZ9VEDU0 for ducted extraction.
- To complete the fully ducted extraction or to do any other individual recirculation planning different ducting accessories are available.
- Planning suggestions:
- - Installation is possible in island as well as wall oriented configurations.
- - The product complies with the Needle Flame Test (according to IEC 60695-5-11), the V2 flammability class (according to UL94) and the B1 building material class (DIN 4102-1). The starter kit HEZ9VRUD0 for unducted recirculation complies with these standards as well.
- - The max. immersion depth is 223mm below glass for top mounted appliances and 227mm for flush installed appliances.
- - The appliance must be freely accessible from below (i.e. for accessing the lower liquid safety collector).
- - No false floor is necessary below the cooktop with integrated downdraft ventilation system. The drawers and/or shelves in the floor unit must be removable. The backpanel of the floor unit can be kept - only a cut-out for the air outlet is needed (position and size can be taken from the installation instructions).
- - The "Plug 'n Play" starter kit HEZ9VRUD0 for unducted recirculation requires a vertical aperture of min. 25mm behind the backpanel of the furniture. Suggested for ideal performance are 50mm.
- - The minimum worktop thickness is 16mm for top mounted and flush installed appliances with the standard installation system. Installation in even thinner worktops is also possible with the spare part: content 626792.
- - The overall appliance weight is 26kg - the bearing capacity and stability, in the case of very thin worktops in particular, must be supported using suitable substructures. The overall appliance weight and the worktop manufacturer's structural integrity specifications are to be taken into account.
- - For partly ducted and unducted recirculation extraction installations, a return-flow aperture of ≥400cm² is to be respected in the plinth area. The aperture can be realized via outlet grids, lamella grids or subtly shortened plinths depending on the assortment of the kitchen furniture manufacturer.
- - The air outlet on the backside of the appliance can directly be accessed with a male flat duct element (DN 150).
- - The pressuredrop resistant blower allows longer and more complex ductings up to 8m with three 90° bows while keeping sufficient performance.
- - When installing a ventilation hood with ducted extraction and a chimney-vented fireplace, the power supply line of the appliance needs a suitable safety switch. This is not required for configurations in recirculated extraction.
- - In ducted extraction configuration a one-way flap (or backflow trap) with a maximum opening pressure of 65Pa should be installed.


# Series 6, Induction hob with integrated ventilation system, 80 cm, surface mount without frame
# PVQ811H26E

measurements in mm

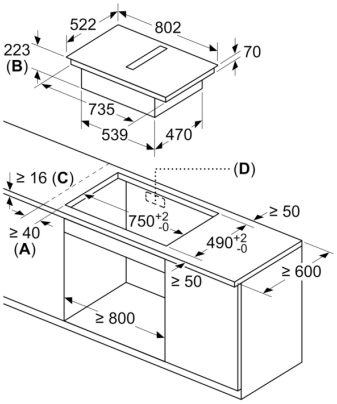



**A**: Minimum distance from the hob cut-out to the wall
**B**: Recessing depth
**C**: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
**D**: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

measurements in mm

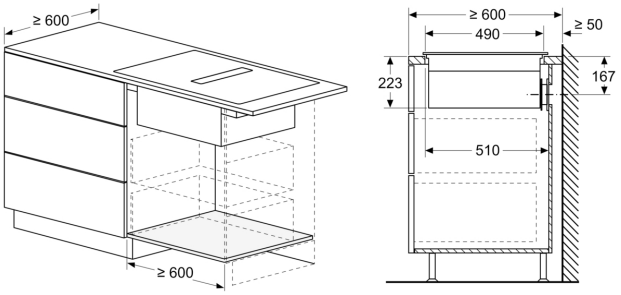



measurements in mm

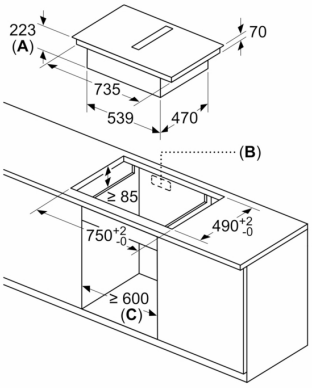


**A**: Recess depth
**B**: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
**C**: All 80 cm width class models can be installed in 60 cm wide furniture by adjusting the side panels.

Measurements in mm

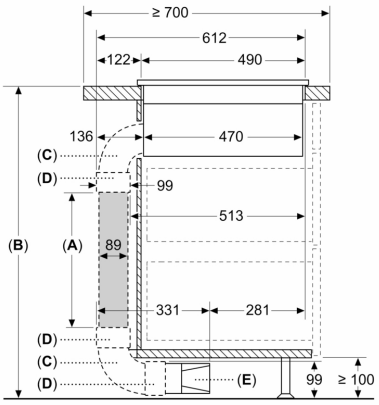



**A:** Tube length
**B:** Kitchen height
**C:** 90° L-size bow
**D:** Connector sleeve
**E:** Diffusor

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height

The installer has to select the tube length and if necessary cut it according to the kitchen height

| A | B |
|---|---|
| 500 | ≤ 960 |
| 1000 | > 960 |

Measurements in mm

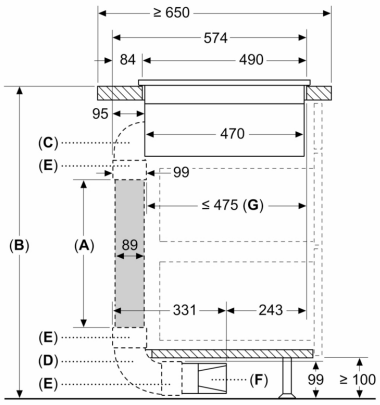



**A:** Tube length
**B:** Kitchen height
**C:** 90° M-size bow
**D:** 90° L-size bow
**E:** Connector sleeve
**F:** Diffusor
**G:** Shortened Drawer

The installer has to select the tube length and if necessary cut it according to the kitchen height

| A | B |
|---|---|
| 500 | ≤ 940 |
| 1000 | > 940 |

Measurements in mm

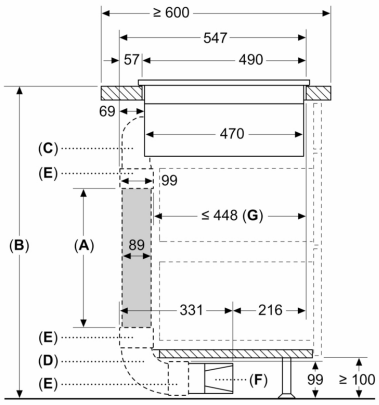



**A:** Tube length
**B:** Kitchen height
**C:** 90° S-size bow
**D:** 90° L-size bow
**E:** Connector sleeve
**F:** Diffusor
**G:** Shortened Drawer

Ducting kit available for ≥ 600 mm depth worktops and up to 960 mm height


The installer has to select the tube length and if necessary cut it according to the kitchen height

| A | B |
|---|---|
| 500 | ≤ 990 |
| 1000 | > 990 |


measurements in mm

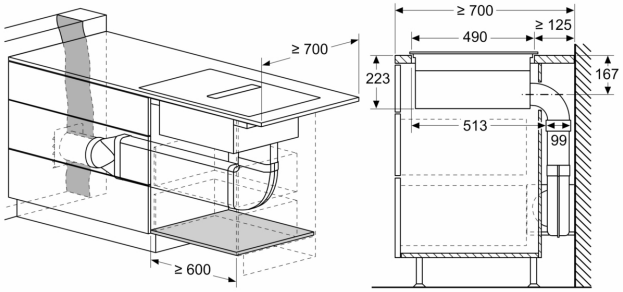



measurements in mm

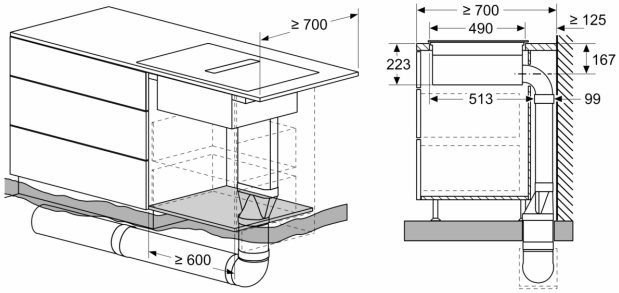



measurements in mm

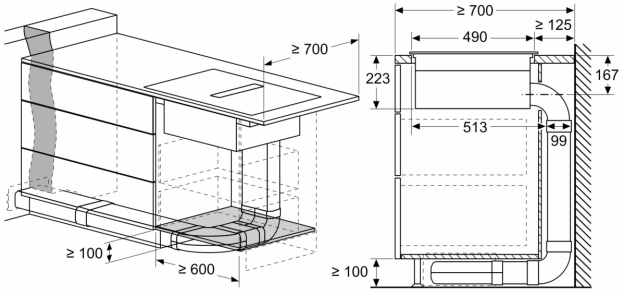



measurements in mm

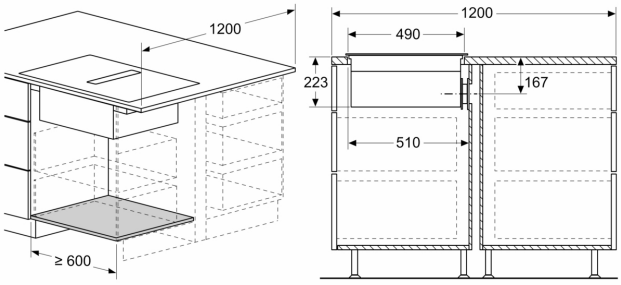

measurements in mm

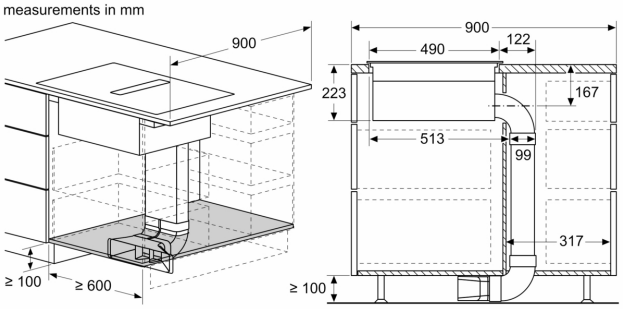



Measurements in mm

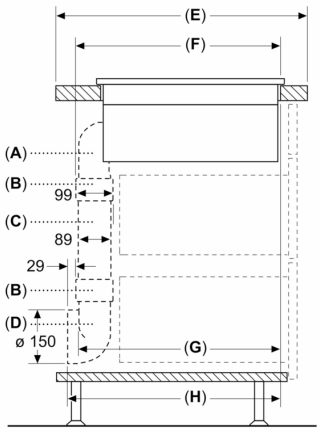


| A | E | F | G | H |
|---|---|---|---|---|
| S-size | ≥ 600 | 547 | 545 | 579 |
| M-size | ≥ 650 | 574 | 569 | 603 |
| L-size | ≥ 700 | 612 | 609 | 643 |

**A:** 90° Bow
**B:** Connector sleeve
**C:** Straight tube
**D:** 90° Adapter round–flat


Measurements in mm

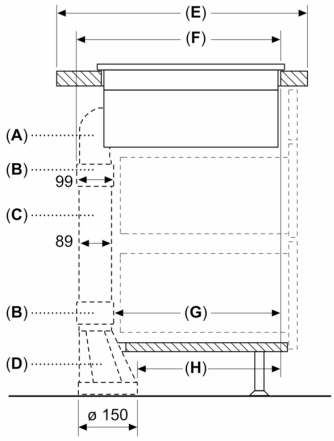


| A | E | F | G | H |
|---|---|---|---|---|
| S-size | ≥ 600 | 547 | 451 | 389 |
| M-size | ≥ 650 | 574 | 475 | 413 |
| L-size | ≥ 700 | 612 | 515 | 453 |


**A:** 90° Bow
**B:** Connector sleeve
**C:** Straight tube
**D:** Straight adapter round-flat

Measurements in mm

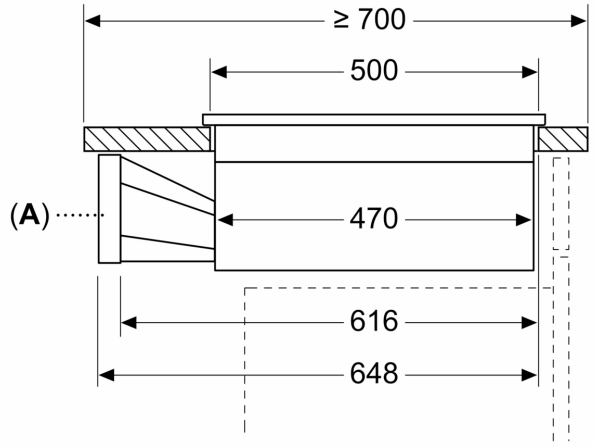



**A:** Adapter round-flat

measurements in mm
Front view

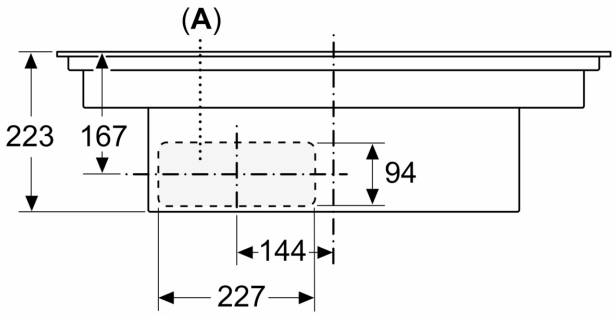



measurements in mm
Front view – unit cut-out
for unducted recirculation

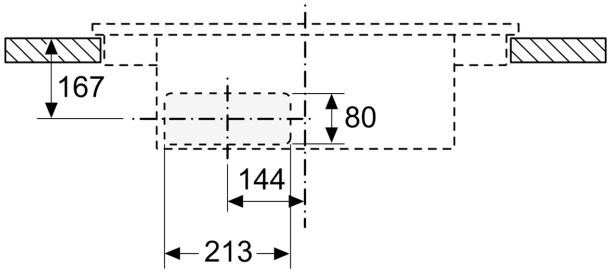



**A**: Connected directly at the rear

measurements in mm
Side view




When installing directly against outer walls that are not insulated (μ ≥ 0.5 W/m² °C), we recommend using partially or fully ducted recirculation configurations.

measurements in mm
Front view

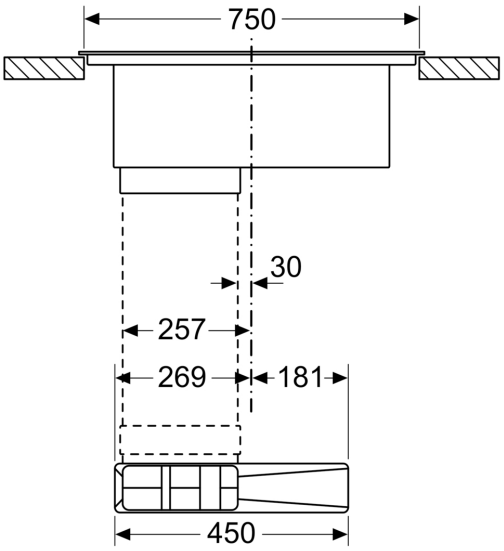

tehnoteka

https://tehnoteka.rs

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Bosch, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Tehnoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Tehnoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Tehnoteka ne odgovara za štetu nanesenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

https://tehnoteka.rs/p/bosch-ugradna-ploca-pvq811h26e-akcija-cena/