

Informacije o proizvodu (EN)

DAHUA monitor 25" IPS LM25-B221B



Cenoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posetite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link:

<https://cenoteka.rs/p/dahua-monitor-25-ips-lm25-b221b/>

DHI-LM25-B221B

Dahua 24.5" FHD Commercial Monitor



- The 144Hz refresh rate provides an instant, tangible improvement in image smoothness;
- The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles;
- Wide color gamut, 85% NTSC, It meets the designer's demand of image texture;
- 1ms fast response time with no image blurring or ghosting;
- Low blue light technology can support a comfortable viewing experience.



Technical Specification

Display

Model	DHI-LM25-B221B
LCD Technology	IPS
Backlight	ELED
Screen Size	24.5 inch
Aspect Ratio	16:9
Viewing Size	543.744 (H) × 302.616 (V) mm
Screen-to-Body Ratio	≥90%
Viewing Angle	178° (H) / 178° (V)
Display Mode	Horizontal
Pixel Pitch	0.2832 mm × 0.2802 mm (0.01" × 0.01")
Pixels Per Inch	89.91
Resolution	1920 (H) × 1080 (V)
Refresh Rate	144 Hz
Display Color	16.7M
Color Gamut	85% NTSC (typ.)
Brightness	300 cd/m ² (typ.)
Contrast Ratio	1,500: 1
Response Time	MPRT 1 ms
Lifespan	30,000 hrs
Surface Treatment	Haze 25%, 3H

Device Ports

Input Port	1 × DP 1.4 (1920 × 1080@144 Hz), 1 × HDMI 2.0 (1920 × 1080@144 Hz)
Output Port	1 × Audio out port

Power & Environmental Conditions

Power Supply	12 VDC, 2.5 A
Power Type	External power adapter
Power Consumption	18 W (basic), 19 W (typ.), 23.8 W (max)
Standby Power Consumption	<0.5 W
Operating Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Operating Humidity	10%–85% (RH), non-condensing
Storage Temperature	–20 °C to +60 °C (–4 °F to +140 °F)
Storage Humidity	5%–90% (RH), non-condensing

General

Inclined Angle	–5° ± 2° / 20° ± 2°
Product Dimensions	557.7 mm × 330.6 mm × 58.1 mm (21.96" × 13.02" × 2.29") (W × H × D), without wall-mount bracket
Package Size	620 mm × 431 mm × 134 mm (24.41" × 16.97" × 5.28") (W × H × D)
Unilateral Splicing	U/L/R/D: 2.1 mm/2.1 mm/2.1 mm/19.6 mm
Net Weight	2.9 kg (6.39 lb)
Gross Weight	3.9 kg (8.60 lb)
Casing Color	Black


DHI-LM25-B221B

Control Mode	Five-button
Status Indicator Light	Yes
Wall Mount VESA	100 mm × 100 mm (3.94" × 3.94")
Accessory	Power adapter, base, HDMI cable, user's manual (QR code), legal and regulatory information, etc.
Optional Accessory	Wall mount
Certification	
Certifications	CE EMC, CE LVD, CE ERP



Ordering Information

Type	Model	Description
LED Monitor	DHI-LM25-B221B	Dahua 24.5" FHD Commercial Monitor

Dimensions (mm[inch])

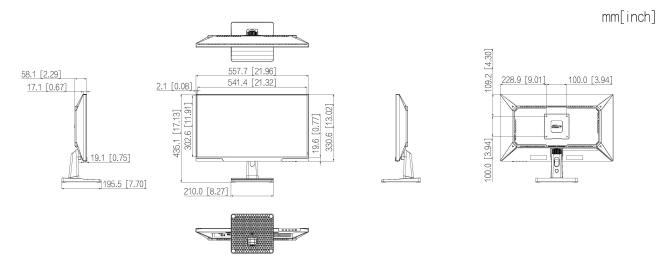

Panels

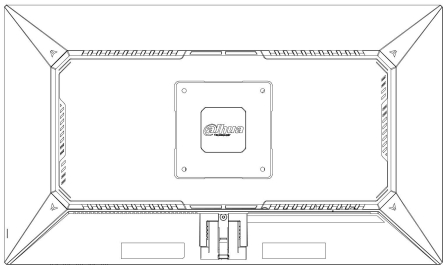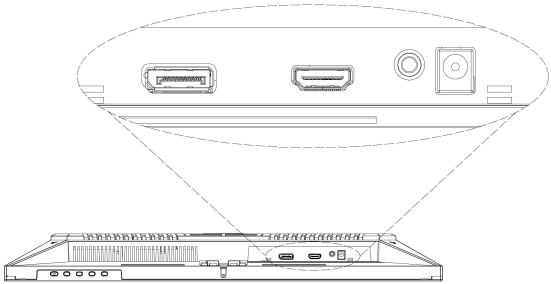

Ovaj dokument je originalno proizveden i objavljen od strane proizvođača, brenda Dahua, i preuzet je sa njihove zvanične stranice. S obzirom na ovu činjenicu, Cenoteka ističe da ne preuzima odgovornost za tačnost, celovitost ili pouzdanost informacija, podataka, mišljenja, saveta ili izjava sadržanih u ovom dokumentu.

Napominjemo da Cenoteka nema ovlašćenje da izvrši bilo kakve izmene ili dopune na ovom dokumentu, stoga nismo odgovorni za eventualne greške, propuste ili netačnosti koje se mogu naći unutar njega. Cenoteka ne odgovara za štetu nanесenu korisnicima pri upotrebi netačnih podataka. Ukoliko imate dodatna pitanja o proizvodu, ljubazno vas molimo da kontaktirate direktno proizvođača kako biste dobili sve detaljne informacije.

Za najnovije informacije o ceni, dostupnim akcijama i tehničkim karakteristikama proizvoda koji se pominje u ovom dokumentu, molimo posetite našu stranicu klikom na sledeći link:

<https://cenoteka.rs/p/dahua-monitor-25-ips-lm25-b221b/>